

MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 3000VA IN: 208...550VAC OUT: 2x115VAC


Single-phase - Control and Isolation Transformers 3000 VA Isolation class T 40/B Other voltages on request.

Link to Product

Illustration



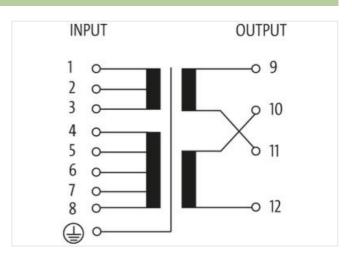



Product may differ from Image





General data		
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0	
Mounting method	Long-hole mounting	
Temperature range	-20+40 °C (storage temperature -40+80 °C)	
Test isolation voltage	4 kV (prim./sec.)	
Drill hole Ø	9×14 mm	
Fixing centers a×b×c	200×174 mm	



stay connected

Dimensions H×W×D	250×197×193 mm
Output	
Output voltage	1× 230, 1× 115, 2× 115 V AC
Output rating	3000 VA
Input	
Input voltage	208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC
Inrush current	273 A (208 V AC); 104 A (550 V AC)
Short-circuit current	553 A (208 V AC); 209 A (550 V AC)
Input current	14.9 A (208 V AC); 5.6 A (550 V AC)
Frequency	5060 Hz
Product article number of manufacturer	86155