



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 320VA IN: 230/400VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers  
320 VA  
Isolation class T 40/B

[Link to Product](#)

Illustration

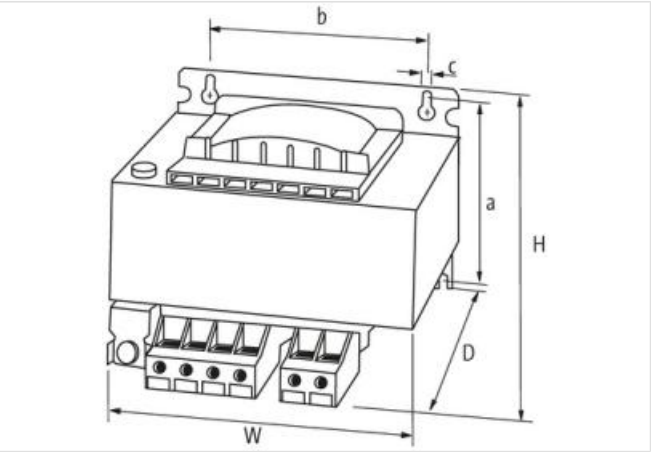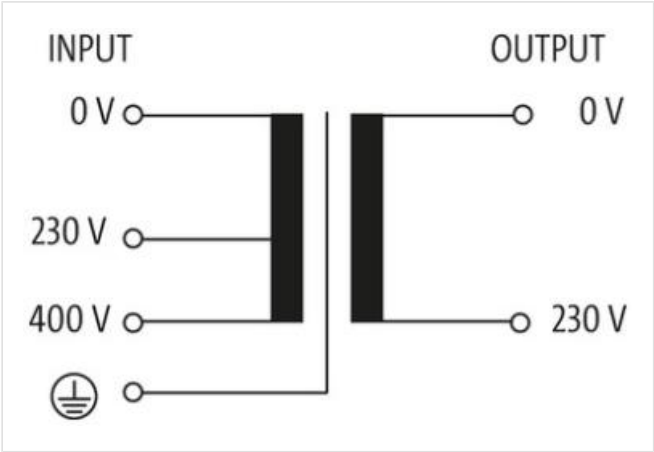

Product may differ from Image



| General data           |                                                 |
|------------------------|-------------------------------------------------|
| Standards              | EN 61558-1, EN 61558-2-4, EN 62041 category 0   |
| Mounting method        | Key-hole mounting                               |
| Temperature range      | -20...+40 °C (storage temperature -40...+80 °C) |
| Test isolation voltage | 4 kV (prim./sec.)                               |
| Drill hole Ø           | 5.8×10 mm                                       |
| Fixing centers a×b×c   | 74.4×90×5.8 mm                                  |
| Dimensions H×W×D       | 92×120×122.4 mm                                 |

| Output                                 |                                      |
|----------------------------------------|--------------------------------------|
| Output voltage                         | 230 V AC                             |
| Output rating                          | 320 VA                               |
| Input                                  |                                      |
| Input voltage                          | 230/400 V AC                         |
| Inrush current                         | 17.5 A (230 V AC); 10.1 A (400 V AC) |
| Short-circuit current                  | 28 A (230 V AC); 16.1 A (400 V AC)   |
| Input current                          | 1.52 A (230 V AC); 0.88 A (400 V AC) |
| Frequency                              | 50...60 Hz                           |
| Product article number of manufacturer | 86306                                |