



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 320VA IN: 230/400VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers  
320 VA  
Spring clamp terminals  
Isolation class T 40/B  
Other voltages on request.

Link to Product

Illustration

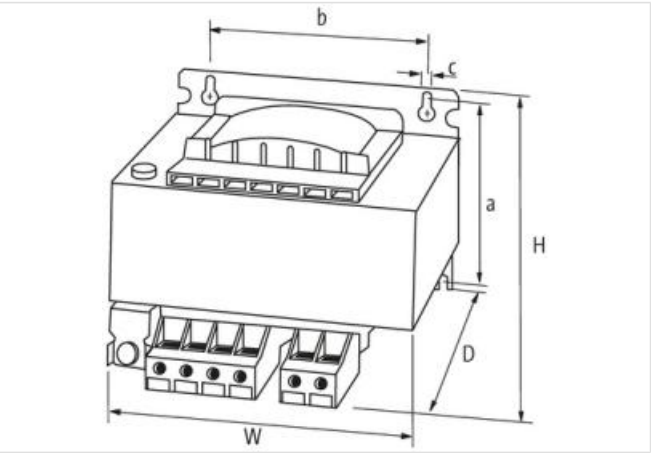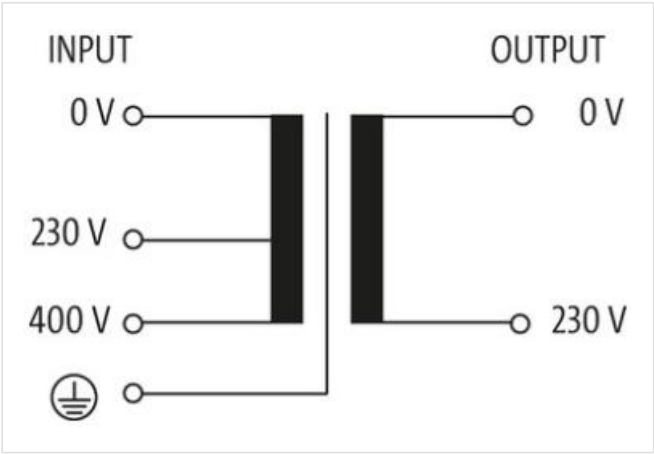

Product may differ from Image



| General data           |                                                 |
|------------------------|-------------------------------------------------|
| Standards              | EN 61558-1, EN 61558-2-4, EN 62041 category 0   |
| Mounting method        | Key-hole mounting                               |
| Temperature range      | -20...+40 °C (storage temperature -40...+80 °C) |
| Test isolation voltage | 4 kV (prim./sec.)                               |
| Drill hole Ø           | 5.8×10 mm                                       |

|                      |                   |
|----------------------|-------------------|
| Fixing centers a×b×c | 74.4×90×5.8 mm    |
| Dimensions H×W×D     | 92.2×120×122.4 mm |

**Output**

|                |          |
|----------------|----------|
| Output voltage | 230 V AC |
| Output rating  | 320 VA   |

**Input**

|                       |                                      |
|-----------------------|--------------------------------------|
| Input voltage         | 230/400 V AC                         |
| Inrush current        | 17.5 A (230 V AC); 10.1 A (400 V AC) |
| Short-circuit current | 28 A (230 V AC); 16.1 A (400 V AC)   |
| Input current         | 1.52 A (230 V AC); 0.88 A (400 V AC) |
| Frequency             | 50...60 Hz                           |

|                                        |         |
|----------------------------------------|---------|
| Product article number of manufacturer | 6686306 |
|----------------------------------------|---------|