
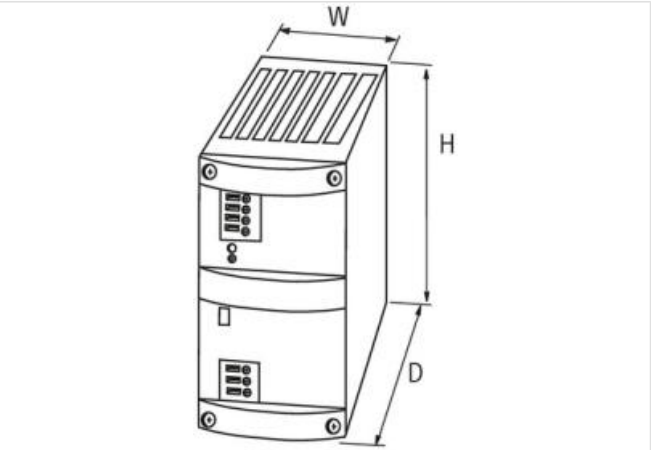


MCS POWER SUPPLY 2-PHASE,
IN: 340-460VAC OUT: 24-28V/10ADC

INPUT: 340...460 V AC
OUTPUT: 24...28 V DC
Current: 10 A

Link to Product

Illustration

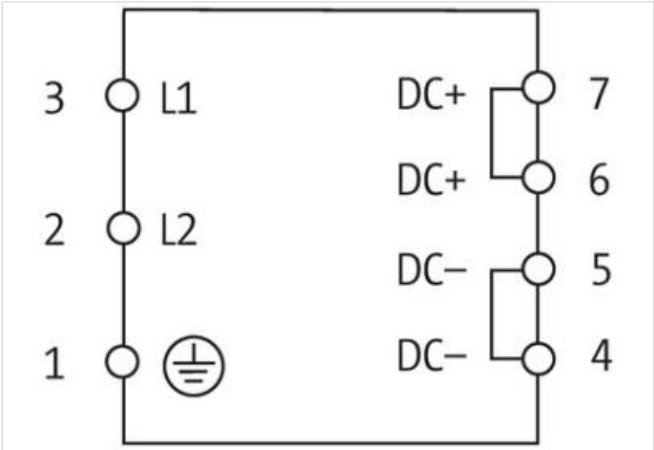

Product may differ from Image



General data	
Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+60 °C (storage temperature -25...+85 °C)
Relative humidity	5...95%, no condensation
Efficiency	88%
Dimensions HxWxD	127x68x160 mm
Output	

Output voltage	24 V DC (SELV), $\pm 1\%$; 24...28 V adjustable
LED display	LED (green) for output voltage
Selectable switch-off mode	front sided plug link (automatic re-start or definite shut-off)
Output current	10 A (+60 °C); 12 A (+40 °C)
Mains failure bridging time	min. 12 ms (400 V AC)
Ripple	max. 20 mV eff/rms
Spikes	max. 200 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	Parallel circuit

Input

Input voltage	340...470 V AC
Primary fusing external	max. 10 A
Input current	1.6 A (400 V AC)
Inrush current after 1 ms	max. 22 A
Frequency	50...60 Hz

Product article number of manufacturer	857726
--	--------