



MPL POWER SUPPLY 3-PHASE, SMOOTHED

IN: 400VAC+/- 5% OUT: 24V/10ADC

Current: 10 A
Output rating: 240 W
This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Link to Product

Illustration

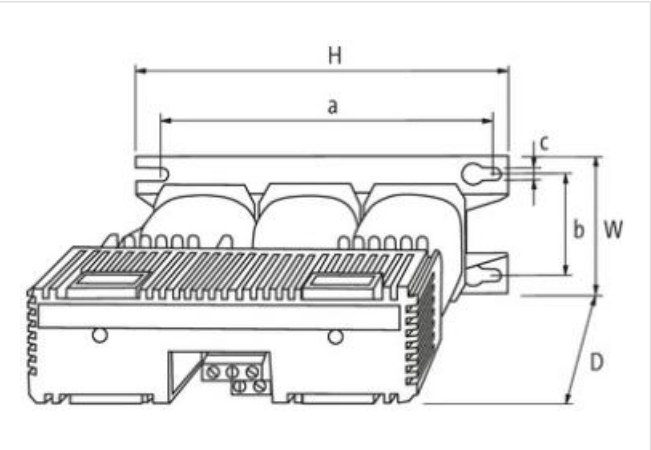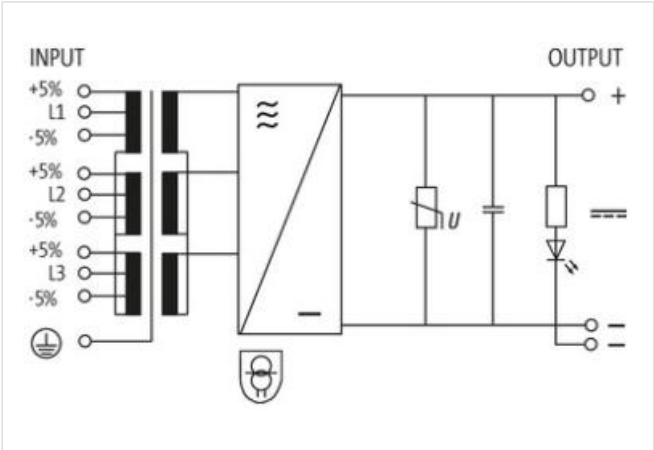

Product may differ from Image



General data	
Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+55 °C, for any mounting position at vertical wall, no condensation
Fixing centers a×b×c	164×58×6.5 mm
Efficiency	75%
Dimensions H×W×D	185×76,5×190 mm

Output	
Output voltage	24 V DC (SELV)
Output fuse external	10 A (T)
Output suppression	LED, VDR and smoothing capacitor
Output current	max. 10 A
Ripple	max. 2% eff/rms
Input	
Input voltage	3× 400 V AC ±5%
Input fuse (external)	0.63 A (T)
Input current	0.55 A (3× 400 V AC)
Frequency	50...60 Hz
Product article number of manufacturer	85925