

A3 Hood, IP67

Single locking lever, top entry M20


АЗ Hood Single locking lever IP67

Technical data will be only guaranteed with Murrelektronik components.

Link to Product

Illustration



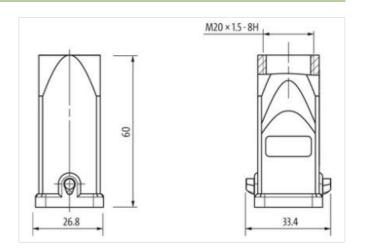

Product may differ from Image

| Technical Data | |
|--|--|
| Mating cycles | min. 500 |
| Locking of ports | Single locking lever |
| Protection (housing) | IP67 inserted and tightened (EN 60529), with gland |
| General data | |
| Temperature range | -40+100 °C |
| Material (housing) | Zinc die casting |
| Housing type | Hood |
| Threaded hole | M20 |
| Size | A3 |
| Cable outlet | straight |
| ocking material | Steel (galvanized) |
| Climatic category | 40/100/21 (EN 60068-1) |
| Material (housing surface) | powder-coated |
| Dimensions H×W×D | 60×26.8×33.4 mm |
| Product article number of manufacturer | 70MH-GTANL-A01B100 |