
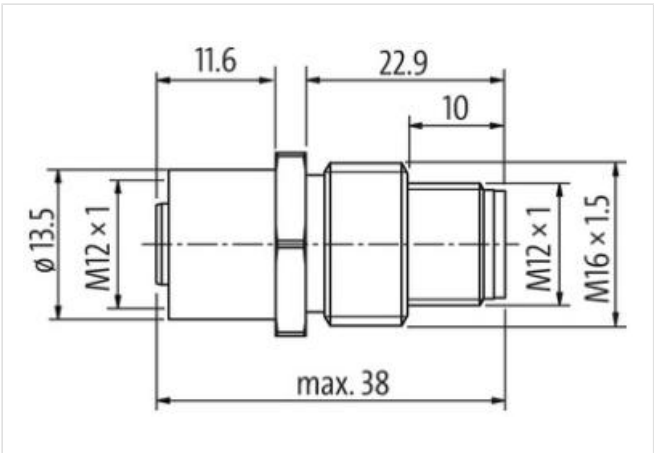
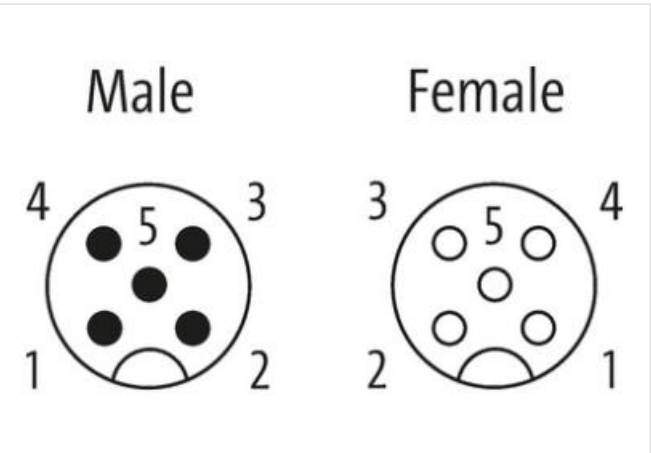


M12-PANEL FEED THROUGH A-CODED

Control cabinet entry system
Male - female
M12, 5-pole
A-coded
shielded

[Link to Product](#)

Illustration

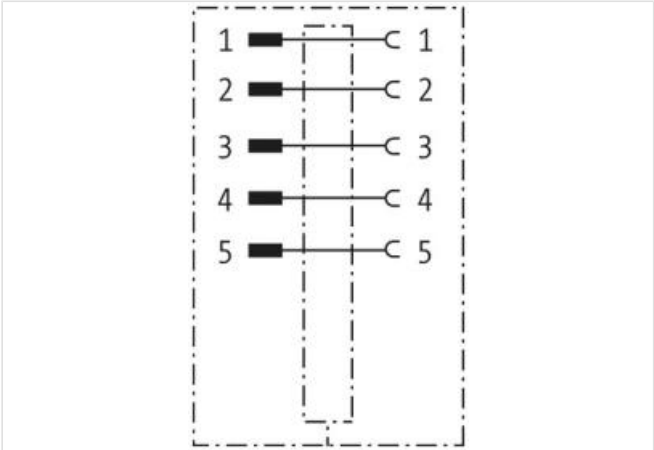

Product may differ from Image



Form

Form 42111

Technical Data

Operating voltage	max. 60 V AC/DC
Operating voltage (only UL listed)	30 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A

Material group	IEC 60664-1, category I
Coding	A-coded
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Protection NEMA	3, 4, 6P (UL 50E)
Material	Brass, nickel plated
General data	
Pollution Degree	2
Temperature range	-25...+85 °C
Mounting set	M16×1.5 mm
Product article number of manufacturer	7000-42111-0000000