


- Single-pole & 3-way combined in a single unit for most models
- Dimmers are available for the following light load types: incandescent/halogen, magnetic low-voltage, electronic low-voltage, fluorescent, compact fluorescent and LED
- Wide offering of “no neutral required for installation” models
- Solid state dimming at full rated wattage capacities for energy savings and lamp life extension
- Voltage compensation on fluorescent-capable dimmers for flicker-free dimming
- Dimmer electronics have built-in surge protection
- Air-gap switches give easy power disconnection for safe re-lamping
- Power-failure memory returns lights to their previous state after a power outage
- Electronic circuitry is protected from static discharge
- Some decorator dimmers feature LED locator lights; lighted rotary and toggle version dimmers are also available
- Line of Title 24 compliant dimmers and fan speed controls



Specific dimmer solutions for today's needs

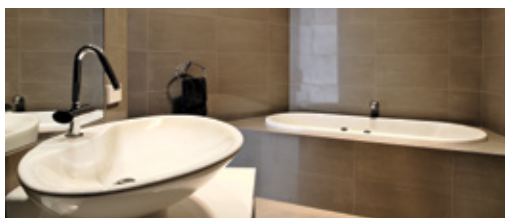

Energy savings

Both microprocessor-controlled and mechanical dimmers are available, that can provide energy savings in addition to ambiance.

See pages A-24 to A-29

Shown:
SAL06P-W




Flexibility

With multiple decorator designs, toggle options, and color choices it's easy to replace an existing switch and maintain a pleasing aesthetic in single-gang or multi-gang installations.

See pages A-24 to A-30

Shown:
DAL06P-C1

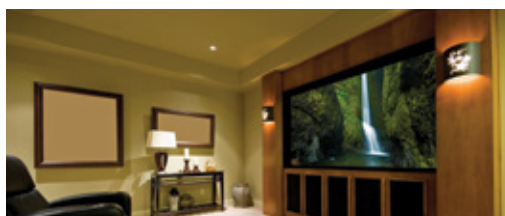

Convenience & automation

Microprocessor controlled “smart” dimmers offer a variety of additional features like soft-ON, fade-OFF, delayed-OFF, and full-bypass-ON for even greater aesthetics and comfort.

See pages A-24, A-25

Shown:
AAL06-C2



Toggle dimmers & fan speed controls

Product description

Single-pole & 3-way

300W/600W or 1000W; 5A; 120V/AC

Incandescent/halogen, magnetic low-voltage, electronic low-voltage, fluorescent, compact fluorescent, LED

Design features

- Integrated toggle switch for ON/OFF and DIM/BRIGHT operation (non-present version)
- Single-pole and 3-way wiring offered in a single unit
- Matches existing wall switches
- Replaces a standard switch and offers dimmer capabilities
- Fully variable fan control allows for precise fan speed setting
- Power failure memory for enhanced convenience
- Precise color matching to match room decor
- Compatible with any traditional toggle switch wallplate or screwless toggle wallplate
- Title 24 compliant (except TFS5)



TI061



TI061L

Incandescent/halogen dimmers



Rating					
W	V/AC	Description	Color suffix	Catalog no.	TITLE 24
600	120	Incandescent/halogen dimmer, single-pole/3-way non-preset	A, B, BK, LA, V, W	□ TI061-__	•
		Lighted incandescent/halogen dimmer, single-pole/3-way non-preset	N/A (Clear)	□ TI061L	•
1000	120	Incandescent/halogen dimmer, single-pole/3-way non-preset	A, B, BK, LA, V, W	□ TI3101-__	•
		Lighted incandescent/halogen dimmer, single-pole/3-way non-preset	N/A (Clear)	□ TI3101L	•

cULus Listed to UL1472, file no. E47967 & CSA C22.2 no. 18

Fan speed controls



Rating				
A	V/AC	Description	Color suffix	Catalog no.
5	120	Fully variable fan speed control, single-pole non-preset, wire leads	A, B, BK, GY, LA, V, W	□ TFS5-__

cULus Listed to UL1917, file no. E202842 & CSA C22.2 no. 156; NOM certified

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)

A	B	BK	GY	LA	V	W
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Ivory)	(White)

Derating information: G-19 **Dimensional information:** A-43 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

TITLE 24 Indicates Title 24 compliant - Page G-4