

Pulling grips


Pulling grips catalog numbering system

Junior duty, light duty, medium duty, heavy duty,
multi-weave & slack weave

Pulling grips

**Pulling grips
sample number:
SKR40052**

Sample number: SKR40052		SKR	400	52
Grip type				
LPJ = Junior duty, flexible eye				
LP = Light duty, flexible eye				
MP = Medium duty, flexible eye				
PH = Heavy duty, rotating eye				
PMR = Multi weave, rotating eye				
PMF = Multi weave, flexible eye				
SKT = Slack, double weave, closed mesh				
SKTL = Slack, double weave, split lace				
SKR = Slack, single weave, split rod				
Cord diameter reference				
25 = .25-.36"	200 = 2.00-2.49"			
37 = .37-.49"	250 = 2.50-2.99"			
50 = .50-.61"	300 = 3.00-3.49"			
62 = .62-.74"	350 = 3.50-3.99"aa			
75 = .75-.99"	400 = 4.00-4.49"			
100 = 1.00-1.25"	450 = 4.50-4.99"			
125 = 1.25-1.49"	500 = 5.00-5.99"			
150 = 1.50-1.74"	600 = 6.00-6.99"			
175 = 1.75-1.99"				
Bale length				
11 = 11"	30 = 30"			
12 = 13"	32 = 32" or 33"			
13 = 14"	33 = 33"			
14 = 14" or 15"	34 = 34"			
15 = 16"	35 = 36"			
16 = 16" or 17"	36 = 36"			
17 = 18"	38 = 38"			
18 = 19"	39 = 39"			
19 = 20"	41 = 41"			
20 = 20" or 21"	42 = 42"			
21 = 21" or 22"	52 = 52"			
23 = 24" or 25"	54 = 54"			
24 = 24"	56 = 56"			
25 = 25" or 26"	58 = 58"			
26 = 26" or 27"	60 = 60"			
27 = 27" or 28"	66 = 66"			
28 = 28"				

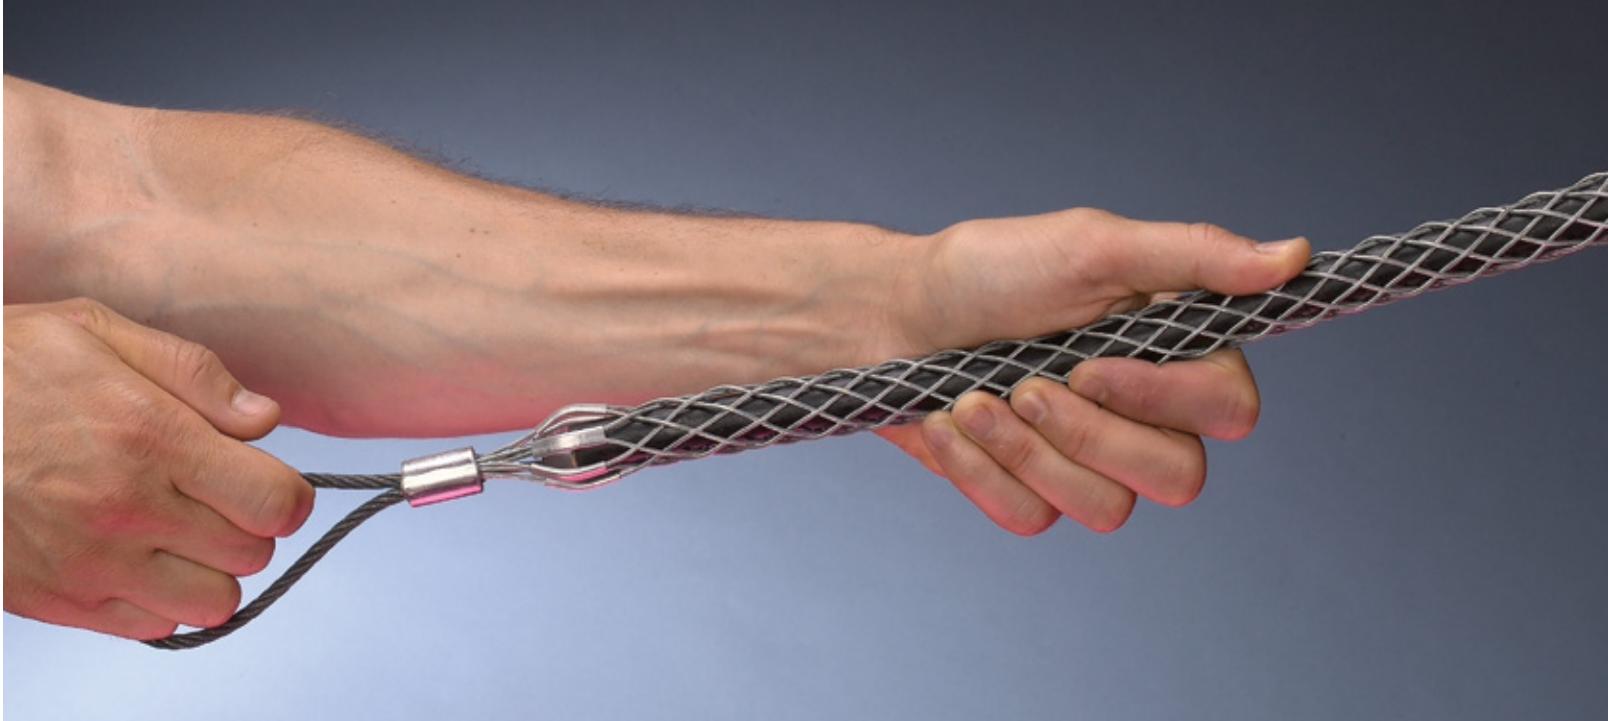

Compliances, specifications and availability are subject to change without notice.



LPJ62

Junior duty

Product description

Flexible eye

Features & applications

- Single weave variable mesh automatically adjusts its grip to the load providing non-slip pulling and protects cable insulation from damage
- They are woven from tinned-bronze wire to provide superior corrosion resistance and are available in single eye and locking bale configurations
- Junior duty series grips are indispensable tools for electricians with small job requirements
- Used in industrial plants, commercial buildings, utility work and light duty underground transmission line stringing
- Junior pulling grips designed for pulling insulated building wire through conduit where pulling tensions are low and to connect a bundle of insulated building wire to a pulling tape

Flexible eye

Cord diameter	Mesh length	Approx. break strength [†]	Catalog no.*	
0.25-0.36" (3.4-9.1mm)	5" (127.0mm)	1,700 lbs.	<input type="checkbox"/> LPJ25	•
0.37-0.49" (9.4-12.4mm)	7" (177.8mm)	1,700 lbs.	<input type="checkbox"/> LPJ37	•
0.50-0.61" (12.7-15.5mm)	8" (203.2mm)	1,700 lbs.	<input type="checkbox"/> LPJ50	•
0.62-0.74" (15.7-19.0mm)	10" (254.0mm)	2,800 lbs.	<input type="checkbox"/> LPJ62	•
0.75-0.99" (19.1-25.1mm)	10" (254.0mm)	4,100 lbs.	<input type="checkbox"/> LPJ75	•
1.00-1.25" (25.4-31.8mm)	12" (304.8mm)	4,100 lbs.	<input type="checkbox"/> LPJ100	•

*Contact the factory for stainless steel support grips.

[†]To determine workload safety factor, divide approximate break strength by 10. See page N-34 for strength information. Consult factory for price and availability.

Compliances, specifications and availability are subject to change without notice.

 Indicates NAFTA compliant - Page Q-30