

## Wallplate families

### Rugged design and quality materials make Arrow Hart wallplates the best choice

Whether faced with a commercial, institutional or industrial setting, you will find the desired material, configuration, style, size and color you need



#### Standard size

Wallplates for precision cuts




#### Mid-size and oversize

Wallplates for applications that require additional wall coverage



#### Extra depth

Wallplates to provide a flush fit to the wall when an old work outlet box is used



#### Specification grade thermoplastic

- Available in both nylon and polycarbonate constructions
- Virtually unbreakable plates reduce installation and replacement costs
- Preferred for industrial, institutional, and other high-traffic areas
- Exclusive time-saving screw catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil-resistant
- Available in standard size and mid-size configurations with screwless and pre-marked special use versions available




#### Specification grade metal wallplates

- Constructed of non-corrosive 302/304 Stainless steel, brass or chrome
- Available in standard, mid-size, and oversize configurations with pre-marked special use versions available
- 302/304 Stainless steel is non-magnetic and non-corrosive for rugged durability
- Solid brass is coated with transparent lacquer to resist premature oxidation
- Shipped with removable protective film
- Recommended for industrial, institutional and commercial applications


## Wallplate dimensional information

### Mounting holes for wallplates and covers


These are the most common nominal spacings for mounting holes on wallplates and covers. Holes are normally countersunk for oval head #6-32 screws.




Device or strap



Box




Decorator/GFCI




FS box

### Cover opening dimensions


Nominal dimensions for cover openings conform to industry standards and practices.



4-wire power device



Off center power device



3-wire power device




Single locking receptacle 20/30 amp




Single receptacle

### Plate opening dimensions


Nominal dimensions for plate openings conform to industry standards and practices.

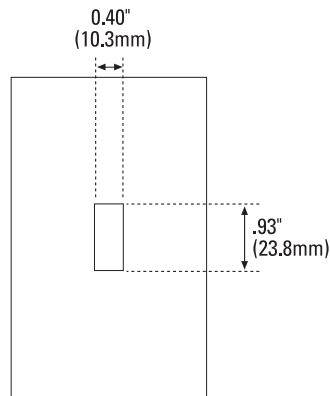

Toggle

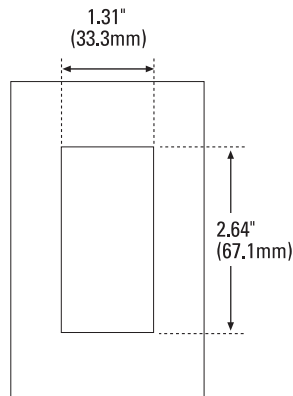

Decorator

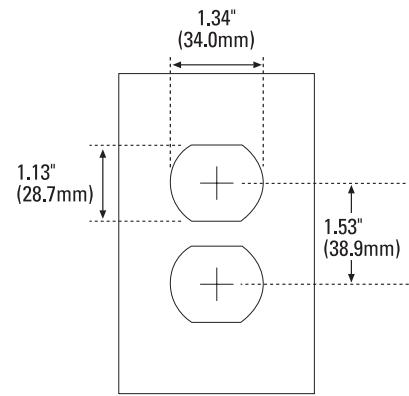


Duplex receptacle


## Wallplate sizes

Gang	Description	Height	Width	First gang to edge	Gang to gang
1-Gang	Standard	4.50" (114.3mm)	2.75" (69.8mm)	1.37" (34.9mm)	—
	Mid-size	4.87" (123.8mm)	3.12" (79.4mm)	1.56" (39.7mm)	—
	Oversize	5.25" (133.3mm)	3.50" (88.9mm)	1.75" (44.4mm)	—
2-Gang	Standard	4.50" (114.3mm)	4.56" (115.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	4.94" (125.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	5.31" (134.9mm)	1.75" (44.4mm)	1.81" (46.0mm)
3-Gang	Standard	4.50" (114.3mm)	6.37" (161.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	6.75" (171.4mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	7.17" (182.2mm)	1.75" (44.4mm)	1.81" (46.0mm)
4-Gang	Standard	4.50" (114.3mm)	8.19" (207.9mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	8.56" (217.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
	Oversize	5.25" (133.3mm)	8.94" (227.0mm)	1.75" (44.4mm)	1.81" (46.0mm)
5-Gang	Standard	4.50" (114.3mm)	10.00" (254.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	10.37" (263.5mm)	1.56" (39.7mm)	1.81" (46.0mm)
6-Gang	Standard	4.50" (114.3mm)	11.81" (300.0mm)	1.37" (34.9mm)	1.81" (46.0mm)
	Mid-size	4.87" (123.8mm)	12.18" (309.5mm)	1.56" (39.7mm)	1.81" (46.0mm)


**Standard**

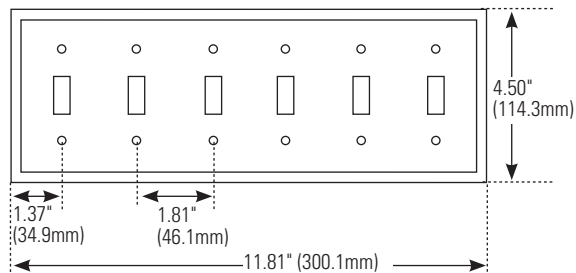


**Mid-size**

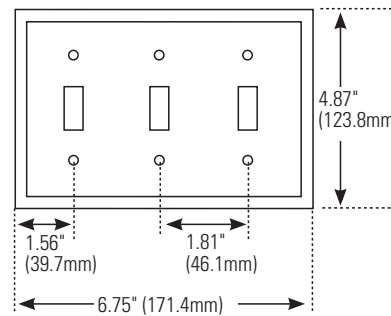

**Oversize Mid-size Standard**

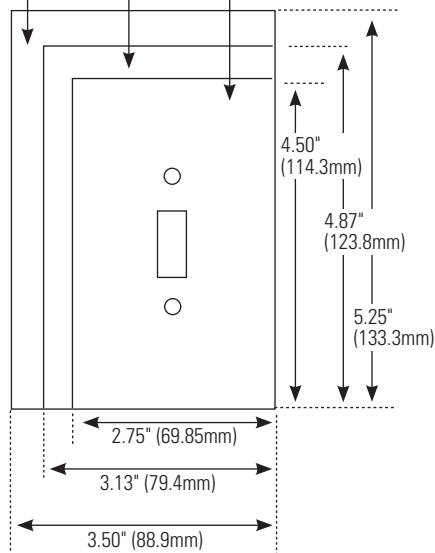


**Oversize**




## Standard size toggle switch wallplates

### Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang













6-Gang

### Toggle switch wallplates

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5134__	•	•
	Thermoset	A, B, LA, V, W	□ 2134__	•	•
	302/304 Stainless steel	—	□ 93071	•	•
	Brass	—	□ 94071	•	•
2-Gang	Nylon	A, B, GY, LA, RD, V, W	□ 5139__	•	•
	Thermoset	A, B, LA, V, W	□ 2139__	•	•
	302/304 Stainless steel	—	□ 93072	•	•
	Brass	—	□ 94072	•	•
3-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5141__	•	•
	Thermoset	A, B, LA, V, W	□ 2141__	•	•
	302/304 Stainless steel	—	□ 93073	•	•
	Brass	—	□ 94073	•	•
4-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5154__	•	•
	Thermoset	A, B, LA, V, W	□ 2154__	•	•
	302/304 Stainless steel	—	□ 93074	•	•
5-Gang	Thermoset	A, B, LA, V, W	□ 2155__	•	•
	302/304 Stainless steel	—	□ 93075	•	•
6-Gang	Thermoset	A, B, V, W	□ 2156__	•	•
	302/304 Stainless steel	—	□ 93076	•	•

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

							
A (Almond)	B (Brown)	BK (Black)	GY (Gray)	LA (Lt. Almond)	RD (Red)	V (Ivory)	W (White)
							
(Stainless Steel)	(Brass)						

**Certification information:** 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** K-22

**Compliances, specifications and availability are subject to change without notice.**



Indicates NAFTA compliant - Page Q-32



RoHS compliant - Page Q-32

# Wallplate specification & performance data

## Wallplates

### Product description

Standard size, mid-size, oversize

Wallplate sizes: standard size, mid-sized & oversize wallplates				
<b>Material type</b>	Thermoset	Nylon	Stainless steel	Polycarbonate
<b>Manufacturing process</b>	Injection molded	Injection molded	Stamped	Injection molded
<b>Testing &amp; code compliance</b>	<ul style="list-style-type: none"> <li>• UL Listed to UL 514D, file no. E33216</li> <li>• cUL Listed to C22.2, no. 42.1, UL file E33216</li> </ul>	<ul style="list-style-type: none"> <li>• UL Listed to UL 514D, file no. E33216</li> <li>• cUL Listed to C22.2, no. 42.1, UL file E33216</li> </ul>	<ul style="list-style-type: none"> <li>• UL Listed to 514D, file no. E92003</li> <li>• CSA certified to C22.2, no. 42.1</li> </ul>	<ul style="list-style-type: none"> <li>• UL Listed to UL 514D, file no. E33216</li> <li>• cUL, UL file E33216 certified to C22.2, no. 42.1</li> </ul>
<b>Environmental specifications</b>	<b>Flammability:</b> Meets UL94 requirements; 5VA rated <b>Temperature rating:</b> -40°C to 90°C (-40°F to 194°F)	<b>Flammability:</b> Meets UL94 requirements; 5VA rated <b>Temperature rating:</b> -40°C to 70°C (-40°F to 158°F)	<b>Flammability:</b> N/A <b>Temperature rating:</b> -40°C to 70°C (-40°F to 158°F)	<b>Flammability:</b> Meets UL94 requirements; 5VA rated <b>Temperature rating:</b> -40° to 70° C (-40°F to 158°F)
<b>Materials</b>	<b>Body:</b> 0.080" thick thermoset urea or phenolic  <b>Inner wallplate:</b> N/A	<b>Body:</b> 0.060" thick thermoplastic  <b>Inner wallplate:</b> N/A	<b>Body:</b> 0.032" thick stainless steel alloy, 18% chromium and 8% nickel for corrosion resistance <b>Inner wallplate:</b> N/A	<b>Body:</b> 0.08" thick thermoplastic polycarbonate  <b>Inner wallplate:</b> 0.071" thick polycarbonate (PJS Series)

Compliances, specifications and availability are subject to change without notice.