


Wallplates

Our extensive line of wallplates is designed and manufactured to perform in a wide range of applications; no matter what you need, you'll find the desired material, configuration, size and color. Their heavy-duty construction provides outstanding performance throughout a home. Available in one- through six-gang configurations.




Wallplate families

Standard size
wallplates




C-10

Mid-size
wallplates



C-17

Oversize
wallplates




C-24

Wallplate
accessories



C-25

Wallplate colors



Almond



Black



Brown



Gray



Ivory



Lt. Almond



White



Brushed Bronze



Blue



Solid Brass




Red



Stainless Steel

- Mid-size screwless wallplates deliver the ultimate in designer looks with a screwless finish; they are fast and easy to install, virtually unbreakable and easy to clean
- Mid-size & oversize wallplates are designed for use in applications where additional wall coverage is needed
- Extra depth wallplates are available for use with old work outlet boxes for a flush fit to the wall
- Available wallplate materials include virtually unbreakable nylon & polycarbonate thermoplastics, 302/304 corrosion resistant stainless steel, brass, and thermoset
- Nylon & polycarbonate wallplates feature screw-catch, a timesaving feature that holds mounting screws captive to simplify installation
- Our wallplates are manufactured according to the performance & dimensional requirements of Federal Specification WP-455, NEMA Standard WD-1, UL Standard 514 and the NEC®

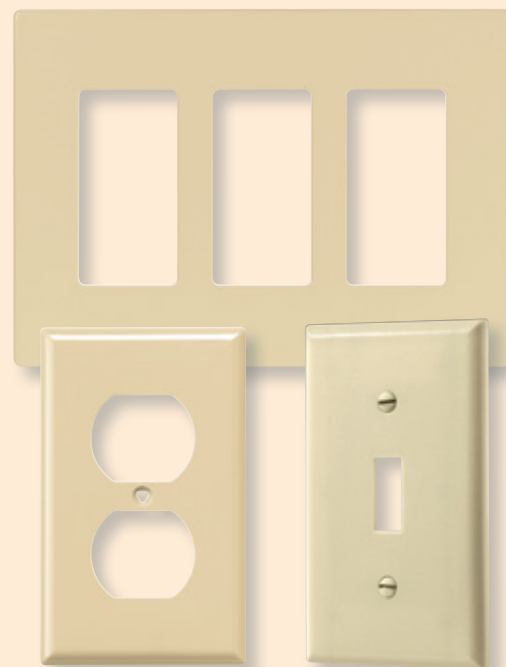

Specific wallplate solutions for today's needs



Aesthetic upgrade

Our screwless wallplates come in 3 different openings for upgrading the look of toggle switches, GFCIs, rotary dimmers and duplex receptacles without having to change out devices!

See pages C-17 to C-19

Shown:
PJS1



Corrosion resistance

Brass and stainless steel wallplates offer durable, elegant corrosion resistance making them ideal for high-moisture locations like kitchens, baths, garages and basements.

See pages C-10 to C-25

Shown:
93101



Impact resistance


Thermoplastic polycarbonate and nylon wallplates are virtually unbreakable, warp resistant, abrasion resistant and soil resistant, making them ideal for high-traffic areas.

See pages C-10 to C-26

Shown:
PJ26



Wallplate material information



Thermoplastic nylon or polycarbonate wallplates

Design features

- Rugged construction reduces installation cost due to less plate breakage and resists bowing to provide a smooth, flat installation
- Exclusive timesaving Screw-catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil resistant
- Polycarbonate wallplates are virtually unbreakable with high structural rigidity, long-term form retention, plus superior impact and abrasion resistance

- Nylon wallplates have a flush-fitting, warp resistant design
- Matching mounting screws provide

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1

Material characteristics

- Flammability: meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Thermoset wallplates

Design features

- Extensive line of non-flammable thermoset plates provides flush-fitting, warp resistant performance

Material characteristics

- Flammability: Meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 65°C (-40°F to 149°F)

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1



302/304 Stainless steel wallplates

Design features

- Superior non-corrosive and non-magnetic properties for applications needing protection from those elements
- Stainless steel alloy contains 18% chromium and 8% nickel for corrosion resistance
- Stamped from 0.032" (0.81mm) thick material
- Horizontally satin-brushed surface finish resists finger prints
- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation

- Matching stainless steel mounting screws provided

Testing & code compliance

- Listed to UL514D, file no. E92122, certified to CSA C22.2, no.42.1

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Brass wallplates

Design features

- Line of handsomely crafted, elegant solid brass designs in 11 popular NEMA standard size configurations
- Strong, corrosion resistant and coated with transparent lacquer to resist premature oxidation
- Horizontally satin-brushed surface finish resists fingerprints
- Matching brass-plated steel screws resist damage during installation

- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation

- Solid brass material is a 70/30 alloy (#26C), .040" (1.02mm) thick

Testing & code compliance


- Listed to UL514D, file no. E92003

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)


Compliances, specifications and availability are subject to change without notice.

Toggle




| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|--------|---------------|--------|-----------------|-------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-Gang | 2134__ | 5134__ | 93071 | 94071 | 2034__ | PJ1__ | PJS1__ | 93971 | 2144__ | 93871 |
| 2-Gang | 2139__ | 5139__ | 93072 | 94072 | 2039__ | PJ2__ | PJS2__ | 93972 | 2149__ | 93872 |
| 3-Gang | 2141__ | 5141__ | 93073 | 94073 | 2041__ | PJ3__ | PJS3__ | 93973 | 2741__ | 93873 |
| 4-Gang | 2154__ | 5154__ | 93074 | — | 2054__ | PJ4__ | PJS4__ | — | — | 93874 |
| 5-Gang | 2155__ | — | 93075 | — | — | PJ5__ | — | — | — | — |
| 6-Gang | 2156__ | — | 93076 | — | — | PJ6__ | — | — | — | — |

Decorator/GFCI




| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|--------|---------------|--------|-----------------|-------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-Gang | 2151__ | 5151__ | 93401 | 94401 | 2051__ | PJ26__ | PJS26__ | 93934 | 2751__ | 93834 |
| 2-Gang | 2152__ | 5152__ | 93402 | 94402 | 2052__ | PJ262__ | PJS262__ | 93935 | — | — |
| 3-Gang | 2163__ | — | 93403 | — | 2063__ | PJ263__ | PJS263__ | 93936 | — | — |
| 4-Gang | 2164__ | — | 93404 | — | 2064__ | PJ264__ | PJS264__ | — | — | — |
| 5-Gang | 2165__ | — | 93405 | — | — | PJ265__ | PJS265__ | — | — | — |
| 6-Gang | 2166__ | — | 93406 | — | — | PJ266__ | PJS266__ | — | — | — |

Duplex receptacle



| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|--------|---------------|--------|-----------------|-------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-Gang | 2132__ | 5132__ | 93101 | 94101 | 2032__ | PJ8__ | PJS8__ | 93901 | 2142__ | 93801 |
| 2-Gang | 2150__ | 5150__ | 93102 | 94102 | 2050__ | PJ82__ | — | 93902 | 2750__ | 93802 |
| 3-Gang | — | — | 93103 | — | — | — | — | — | — | — |


Blank



| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|-------------|---------------|--------|-----------------|-------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-Gang | 2129__ | 5129__ | 93151 | 94151 | 2029__ | PJ13__ | — | 93951 | 2729__ | 93851 |
| 2-Gang | 2137__ | 5137__ | 93152 | — | 2037__ | PJ23__ | — | — | — | 93852 |
| 3-Gang | — | — | 93153 | — | — | — | — | — | — | — |
| 4-Gang | — | — | 93154 | — | — | — | — | — | — | — |
| 1-strap mt. | — | — | — | — | — | PJ14__ | — | — | — | — |


Compliances, specifications and availability are subject to change without notice.

Power outlet



| Gang | Standard size | | | | Mid-size | | | | Oversize | |
|--------------|---------------|--------|-----------------|--------|-----------|---------------|-----------|-----------------|-----------|-----------------|
| | Thermoset | Nylon | Stainless steel | Chrome | Thermoset | Polycarbonate | Screwless | Stainless steel | Thermoset | Stainless steel |
| 1-1.40" Hole | 2131__ | 5131__ | 93091 | — | — | PJ7__ | — | — | 2731__ | 93891 |
| 1-1.59" Hole | — | — | 93111 | — | — | PJ720__ | — | — | — | — |
| 1-2.15" Hole | — | — | 93221 | 39CH | 2068__ | PJ724__ | — | — | — | — |
| 2-2.15" Hole | 2168__ | — | 93227 | 68 | — | PJ703__ | — | — | — | — |

Combination




| Gang | Standard size | | | | Mid-size | | | Oversize |
|-------------------------------|---------------|--------|-----------------|-------|-----------|---------------|-----------------|-----------|
| | Thermoset | Nylon | Stainless steel | Brass | Thermoset | Polycarbonate | Stainless steel | Thermoset |
| Toggle & duplex receptacle | 2138__ | 5138__ | 93532 | 94532 | 2038__ | PJ18__ | 93932 | 2148__ |
| Toggle & decorator | 2153__ | 5153__ | 93432 | 94432 | 2053__ | PJ126__ | 93937 | — |
| Toggle & blank | — | 5171__ | — | — | — | PJ113__ | — | — |
| Duplex receptacle & blank | — | 5170__ | — | — | — | PJ138__ | — | — |
| Duplex receptacle & decorator | 2157__ | — | — | — | — | PJ826__ | — | — |



| Gang | Standard size | | | Mid-size |
|-------------------------------|---------------|--------|-----------------|---------------|
| | Thermoset | Nylon | Stainless steel | Polycarbonate |
| 2 Toggles & duplex receptacle | 2158__ | 5158__ | 93543 | PJ28__ |
| 2 Toggles & decorator | 2173__ | — | 93443 | PJ226__ |

Size options

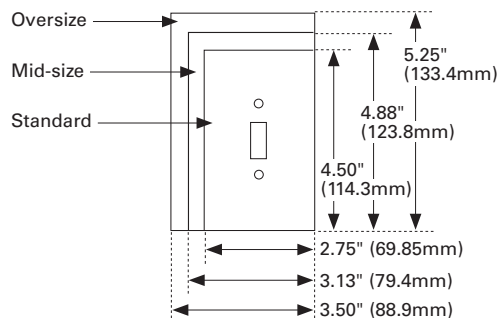

Color ordering information:

A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel, BB (Brushed Bronze)


| | | | | | | | | | | | |
|----------|---------|---------|--------|--------|--------------|-------|---------|---------|---------|-------------------|------------------|
| A | B | BK | BL | GY | LA | RD | V | W | Brass | Stainless Steel | BB |
| (Almond) | (Brown) | (Black) | (Blue) | (Gray) | (Lt. Almond) | (Red) | (Ivory) | (White) | (Brass) | (Stainless Steel) | (Brushed Bronze) |

*Note: See pages C-9 – C-24 for full specifications and available color options.

Compliances, specifications and availability are subject to change without notice.

Mounting holes for wallplates and covers

These are the most common nominal spacings for mounting holes on wallplates and covers. Holes are normally countersunk for oval head #6-32 screws.

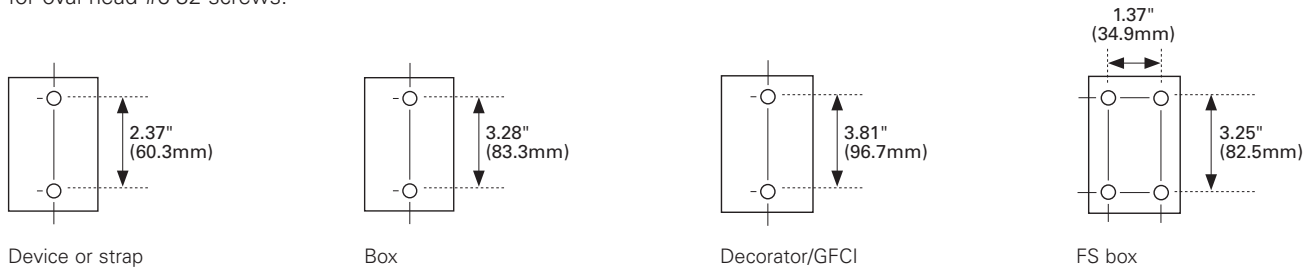

Cover opening dimensions

Nominal dimensions for cover openings conform to industry standards and practices.


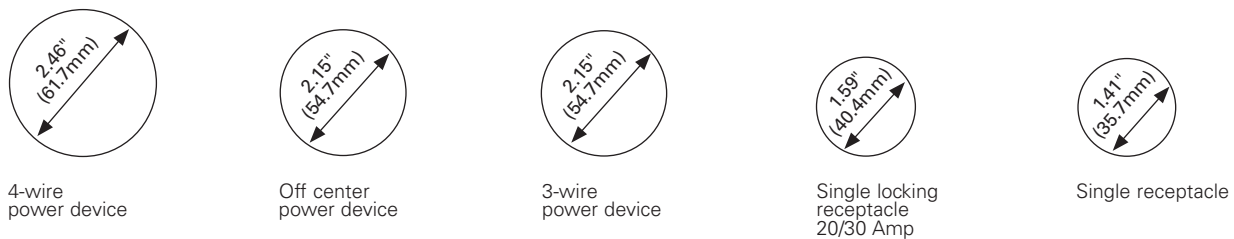


Plate opening dimensions

Nominal dimensions for plate openings conform to industry standards and practices.

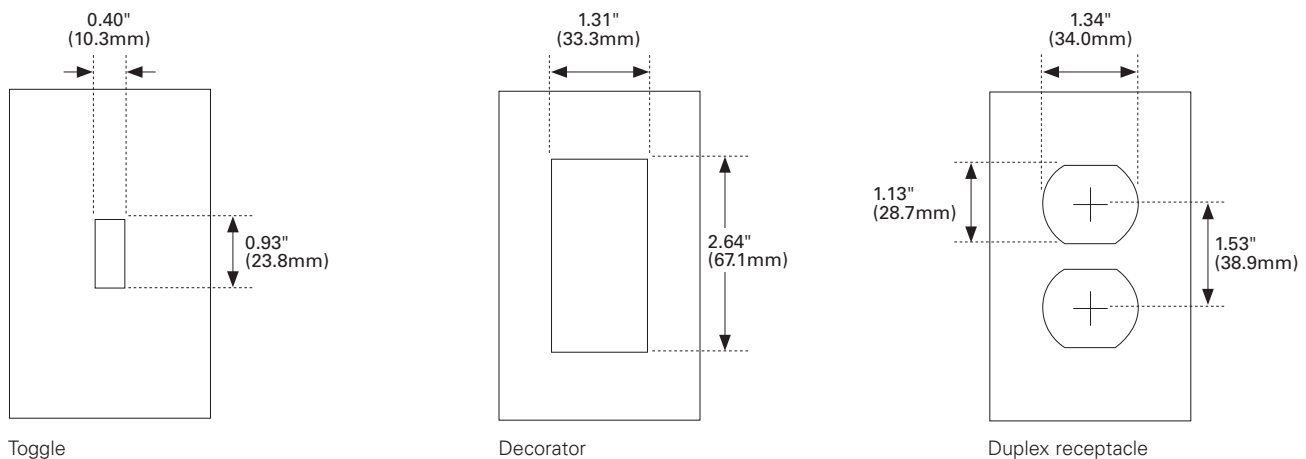


Compliances, specifications and availability are subject to change without notice.


Wallplate sizes

| Gang | Description | Height | Width | First gang to edge | Gang to gang |
|--------|-------------|-----------------|------------------|--------------------|----------------|
| 1-Gang | Standard | 4.50" (114.3mm) | 2.75" (34.9mm) | 1.37" (34.9mm) | — |
| | Mid-size | 4.87" (123.8mm) | 3.13" (79.4mm) | 1.56" (39.7mm) | — |
| | Oversize | 5.25" (133.4mm) | 3.5" (88.9mm) | 1.75" (44.4mm) | — |
| 2-Gang | Standard | 4.50" (114.3mm) | 4.56" (115.9mm) | 1.37" (34.9mm) | 1.81" (46.0mm) |
| | Mid-size | 4.87" (123.8mm) | 4.94" (125.4mm) | 1.56" (39.7mm) | 1.81" (46.0mm) |
| | Oversize | 5.25" (133.4mm) | 5.31" (134.9mm) | 1.75" (44.4mm) | 1.81" (46.0mm) |
| 3-Gang | Standard | 4.50" (114.3mm) | 6.37" (161.9mm) | 1.37" (34.9mm) | 1.81" (46.0mm) |
| | Mid-size | 4.87" (123.8mm) | 6.75" (171.4mm) | 1.56" (39.7mm) | 1.81" (46.0mm) |
| | Oversize | 5.25" (133.4mm) | 7.17" (182.2mm) | 1.75" (44.4mm) | 1.81" (46.0mm) |
| 4-Gang | Standard | 4.50" (114.3mm) | 8.19" (207.9mm) | 1.37" (34.9mm) | 1.81" (46.0mm) |
| | Mid-size | 4.87" (123.8mm) | 8.56" (217.5mm) | 1.56" (39.7mm) | 1.81" (46.0mm) |
| | Oversize | 5.25" (133.4mm) | 8.94" (227.0mm) | 1.75" (44.4mm) | 1.81" (46.0mm) |
| 5-Gang | Standard | 4.50" (114.3mm) | 10.00" (254.0mm) | 1.37" (34.9mm) | 1.81" (46.0mm) |
| | Mid-size | 4.87" (123.8mm) | 10.37" (263.5mm) | 1.56" (39.7mm) | 1.81" (46.0mm) |
| 6-Gang | Standard | 4.50" (114.3mm) | 11.81" (300.0mm) | 1.37" (34.9mm) | 1.81" (46.0mm) |
| | Mid-size | 4.87" (123.8mm) | 12.18" (309.5mm) | 1.56" (39.7mm) | 1.81" (46.0mm) |


Standard

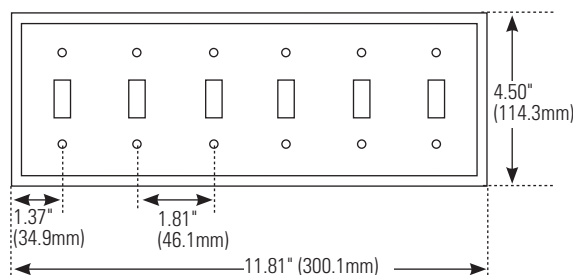


Mid-size

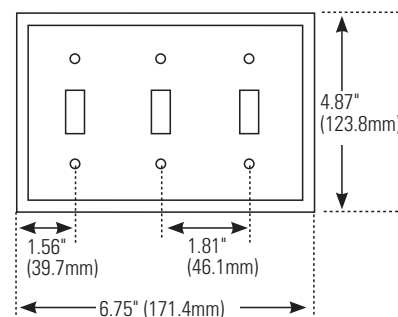

Oversize Mid-size Standard

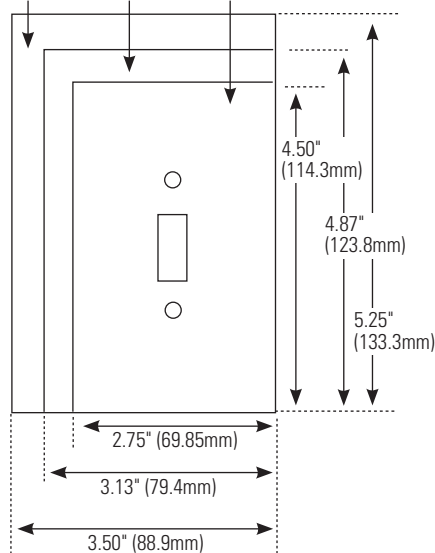

Oversize




Compliances, specifications and availability are subject to change without notice.


Standard size toggle switch wallplates

Product description


1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang













6-Gang

Toggle switch

| Gang | Material | Color suffix | Catalog no. |  |  |
|--------|-------------------------|----------------------------|-------------|---|---|
| 1-Gang | Nylon | A, B, BK, GY, LA, RD, V, W | □ 5134__ | • | • |
| | Thermoset | A, B, LA, V, W | □ 2134__ | • | • |
| | 302/304 Stainless steel | — | □ 93071 | • | • |
| | Brass | — | □ 94071 | • | • |
| 2-Gang | Nylon | A, B, BK, GY, LA, RD, V, W | □ 5139__ | • | • |
| | Thermoset | A, B, LA, V, W | □ 2139__ | • | • |
| | 302/304 Stainless steel | — | □ 93072 | • | • |
| | Brass | — | □ 94072 | • | • |
| 3-Gang | Nylon | A, B, BK, GY, LA, V, W | □ 5141__ | • | • |
| | Thermoset | A, B, LA, V, W | □ 2141__ | • | • |
| | 302/304 Stainless steel | — | □ 93073 | • | • |
| | Brass | — | □ 94073 | • | • |
| 4-Gang | Nylon | A, B, BK, GY, LA, V, W | □ 5154__ | • | • |
| | Thermoset | A, B, LA, V, W | □ 2154__ | • | • |
| | 302/304 Stainless steel | — | □ 93074 | • | • |
| 5-Gang | Thermoset | A, B, LA, V, W | □ 2155__ | • | • |
| | 302/304 Stainless steel | — | □ 93075 | • | • |
| 6-Gang | Thermoset | A, B, V, W | □ 2156__ | • | • |
| | 302/304 Stainless steel | — | □ 93076 | • | • |

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel

| | | | | | | | |
|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| A (Almond) | B (Brown) | BK (Black) | GY (Gray) | LA (Lt. Almond) | RD (Red) | V (Ivory) | W (White) |
|  |  | | | | | | |
| (Brass) | (Stainless Steel) | | | | | | |

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


 Indicates NAFTA compliant - Page G-21

 RoHS compliant - Page G-21


Standard size duplex receptacle wallplates

Product description


1-Gang, 2-Gang, 3-Gang




1-Gang



2-Gang





3-Gang



1-Gang

Duplex receptacle



| Gang | Material | Color suffix | Catalog no. |  |  |
|--------|-------------------------|----------------------------|-------------|---|---|
| 1-Gang | Nylon | A, B, BK, GY, LA, RD, V, W | □ 5132__ | • | • |
| | Thermoset | A, B, LA, V, W | □ 2132__ | • | • |
| | 302/304 Stainless steel | — | □ 93101 | • | • |
| | Brass | — | □ 94101 | • | • |
| 2-Gang | Nylon | A, B, BK, GY, LA, RD, V, W | □ 5150__ | • | • |
| | Thermoset | A, B, LA, V, W | □ 2150__ | • | • |
| | 302/304 Stainless steel | — | □ 93102 | • | • |
| | Brass | — | □ 94102 | • | • |
| 3-Gang | 302/304 Stainless steel | — | □ 93103 | • | • |

Standard size single receptacle wallplates

Product description











1-Gang

Single receptacle

| Gang | Material | Color suffix | Catalog no. |  |  |
|--------|-------------------------|------------------------|-------------|---|---|
| 1-Gang | Nylon | A, B, BK, GY, RD, V, W | □ 5131__ | • | • |
| | Thermoset | A, B, LA, V, W | □ 2131__ | • | • |
| | 302/304 Stainless steel | — | □ 93091 | • | • |
| | Brass | — | □ 94091 | • | • |

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  |  |
| A (Almond) | B (Brown) | BK (Black) | GY (Gray) | LA (Lt. Almond) | RD (Red) | V (Ivory) | W (White) | (Brass) | (Stainless Steel) |

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


 Indicates NAFTA compliant - Page G-21

 RoHS compliant - Page G-21


Standard size decorator wallplates

Product description


1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang





6-Gang

Decorator

| Gang | Material | Color suffix | Catalog no. |  |  |
|--------|-------------------------|--------------------------------|-------------|---|---|
| 1-Gang | Nylon | A, B, BL, BK, GY, LA, RD, V, W | □ 5151__ | • | • |
| | Thermoset | A, B, BK, GY, LA, V, W | □ 2151__ | • | • |
| | 302/304 Stainless steel | — | □ 93401 | • | • |
| | Brass | — | □ 94401 | • | • |
| 2-Gang | Nylon | A, B, BK, GY, LA, V, W | □ 5152__ | • | • |
| | Thermoset | A, B, BK, GY, LA, V, W | □ 2152__ | • | • |
| | 302/304 Stainless steel | — | □ 93402 | • | • |
| | Brass | — | □ 94402 | • | • |
| 3-Gang | Thermoset | A, B, GY, LA, V, W | □ 2163__ | • | • |
| | 302/304 Stainless steel | — | □ 93403 | • | • |
| 4-Gang | Thermoset | A, B, LA, V, W | □ 2164__ | • | • |
| | 302/304 Stainless steel | — | □ 93404 | • | • |
| 5-Gang | Thermoset | A, B, LA, V, W | □ 2165__ | • | • |
| | 302/304 Stainless steel | — | □ 93405 | • | • |
| 6-Gang | Thermoset | A, B, LA, V, W | □ 2166__ | • | • |
| | 302/304 Stainless steel | — | □ 93406 | • | • |

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel

| | | | | | | | | |
|---|---|-----------|-----------|-----------|--------------|-----------|----------|----------|
| A | B | BK | BL | GY | LA | RD | V | W |
| (Almond) | (Brown) | (Black) | (Blue) | (Gray) | (Lt. Almond) | (Red) | (Ivory) | (White) |
|  |  | | | | | | | |
| (Brass) | (Stainless Steel) | | | | | | | |

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.


 Indicates NAFTA compliant - Page G-21

 RoHS compliant - Page G-21


Standard size decorator wallplates

Product description


1-Gang, 2-Gang, 3-Gang, 4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang





5-Gang





6-Gang

Decorator wallplates

| Gang | Material | Color suffix | Catalog no. |  |  |
|--------|-------------------------|--------------------------------|-------------|---|---|
| 1-Gang | Nylon | A, B, BK, BL, GY, LA, RD, V, W | □ 5151__ | • | • |
| | Thermoset | A, B, BK, GY, LA, V, W | □ 2151__ | • | • |
| | 302/304 Stainless steel | — | □ 93401 | • | • |
| | Brass | — | □ 94401 | • | • |
| 2-Gang | Nylon | A, B, BK, GY, LA, V, W | □ 5152__ | • | • |
| | Thermoset | A, B, BK, GY, LA, V, W | □ 2152__ | • | • |
| | 302/304 Stainless steel | — | □ 93402 | • | • |
| | Brass | — | □ 94402 | • | • |
| 3-Gang | Thermoset | A, B, GY, LA, V, W | □ 2163__ | • | • |
| | 302/304 Stainless steel | — | □ 93403 | • | • |
| 4-Gang | Thermoset | A, B, LA, V, W | □ 2164__ | • | • |
| | 302/304 Stainless steel | — | □ 93404 | • | • |
| 5-Gang | Thermoset | A, B, LA, V, W | □ 2165__ | • | • |
| | 302/304 Stainless steel | — | □ 93405 | • | • |
| 6-Gang | Thermoset | A, B, LA, V, W | □ 2166__ | • | • |
| | 302/304 Stainless steel | — | □ 93406 | • | • |

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), BL (Blue), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

| | | | | | | | | |
|---|---|-----------|-----------|-----------|--------------|-----------|----------|----------|
| A | B | BK | BL | GY | LA | RD | V | W |
| (Almond) | (Brown) | (Black) | (Blue) | (Gray) | (Lt. Almond) | (Red) | (Ivory) | (White) |
|  |  | | | | | | | |
| (Stainless Steel) | (Brass) | | | | | | | |

Certification information: 2000, 4000, 5000, ST & PJ series wallplates are cULus Listed; 93000 series wallplates are UL Listed and CSA Certified; 94000 series are UL Listed and CSA certified. **Specification information:** K-22

Compliances, specifications and availability are subject to change without notice.



Indicates NAFTA compliant - Page Q-32



RoHS compliant - Page Q-32