


## Standard grade spring action thermoplastic plugs & connectors

### Product description

2-pole, 2-wire non-grounding  
15A, 125V/AC



1-15P 1-15R

### Design features

- Made of high impact-resistant thermoplastic for long-term durability
- Cord clips on equipped plugs provide easy storage on appliances such as vacuum cleaners and fans



SA940



SA155

### Spring action plugs & connectors



Rating A V/AC	Description	Cord diameter	Color suffix	Plug catalog no.	Connector catalog no.	
15 125	NEMA 1-15, straight body, polarized, with cord clip	0.33" (8.3mm)	W	□ SA940W		•
15 125	NEMA 1-15, straight body, polarized, with cord clip	0.33" (8.3mm)	BK	□ SA940		•
15 125	NEMA 1-15, straight body, polarized	0.33" (8.3mm)	B, GD, W	□ SA540__	□ SA155__	•
15 125	NEMA 1-15, straight body, polarized	0.33" (8.3mm)	BK	□ SA540	□ SA155	•

cULus Listed to UL498, file no. E15012; CSA certified to C22.2, no. 42

## Standard grade spring action thermoplastic plugs & connectors

### Product description

2-pole, 3-wire grounding  
15A, 125V/AC



5-15P 5-15R

### Design features

- Made of high impact-resistant thermoplastic for long-term durability
- Plug blades firmly embedded in body



SA399



SA993

### Spring action plugs & connectors



Rating A V/AC	Description	Cord diameter	Color suffix	Plug catalog no.	Connector catalog no.	
15 125	NEMA 5-15, straight body	0.33" (8.3mm)	GY, O, W	□ SA399__	□ SA993__	•
15 125	NEMA 5-15, straight body	0.33" (8.3mm)	BK	□ SA399	□ SA993	•

Listed to UL498, file no. E15012; CSA certified to CSA C22.2, no. 42; SA993 also NOM certified

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: B (Brown), BK (Black), GD (Translucent Gold), GY (Gray), O (Orange), W (White)

B	BK	GD	GY	O	W
(Brown)	(Black)	(Translucent Gold)	(Gray)	(Orange)	(White)


**Dimensional information:** B-71 **Specification information:** Please visit [www.eaton.com/wiringdevices](http://www.eaton.com/wiringdevices)

**Compliances, specifications and availability are subject to change without notice.**

Indicates NAFTA compliant - Page G-21


## Standard rubber plugs & connectors

Family	A	B	C	D	Cord Dia.
<b>Plug</b>	1.17" (29.7mm)	1.25" (31.8mm)	0.71" (18.0mm)	0.73" (18.5mm)	0.33" (8.4mm)
<b>Angled plug</b>	1.17" (29.7mm)	1.15" (29.2mm)	0.73" (18.5mm)	—	0.33" (8.4mm)
<b>Connector</b>	1.18" (30.0mm)	2.00" (50.8mm)	0.71" (18.0mm)	—	0.33" (8.4mm)

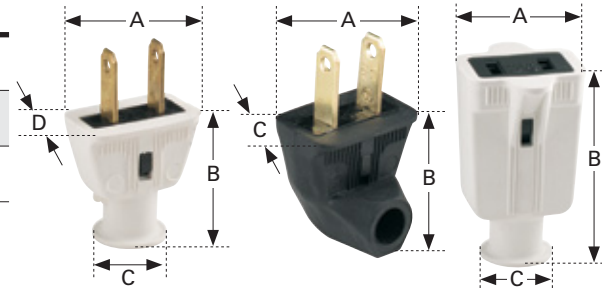


## Spring action plugs & connectors

Family	A	B	C	D	E	Cord Dia.
<b>2P, 2W plug</b>	1.16" (29.5mm)	1.37" (34.8mm)	0.75" (19.1mm)	0.62" (15.7mm)	0.75" (19.1mm)	0.33" (8.4mm)
<b>2P, 2W connector</b>	1.17" (29.7mm)	1.78" (45.2mm)	0.75" (19.1mm)	0.62" (15.7mm)	0.75" (19.1mm)	0.33" (8.4mm)
<b>2P, 3W plug</b>	1.08" (27.4mm)	1.56" (39.6mm)	0.70" (17.8mm)	0.70" (17.8mm)	1.22" (31.0mm)	0.32" (8.1mm)
<b>2P, 3W connector</b>	1.08" (27.4mm)	2.25" (57.2mm)	0.70" (17.8mm)	0.70" (17.8mm)	1.22" (31.0mm)	0.32" (8.1mm)

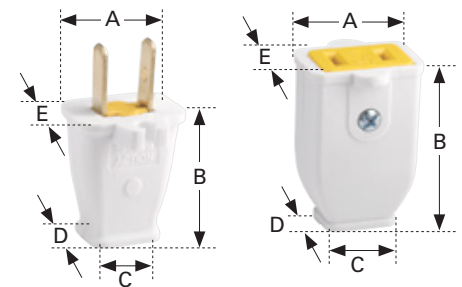


## Standard thermoplastic plugs & connectors

Family	A	B	C	Cord Dia.
<b>Flat plugs</b>	1.48" (37.6mm)	1.19" (30.2mm)	0.92" (23.4mm)	0.31" (7.9mm)
<b>Round plugs</b>	1.28" (32.5mm)	1.50" (38.1mm)	0.75" (19.1mm)	0.41" (10.3mm)
<b>Cylindrical plugs</b>	1.54" (39.1mm)	1.72" (43.7mm)	—	0.67" (17.0mm)
<b>Cylindrical connectors</b>	1.37" (34.8mm)	2.60" (66.0mm)	1.54" (39.1mm)	0.67" (17.0mm)

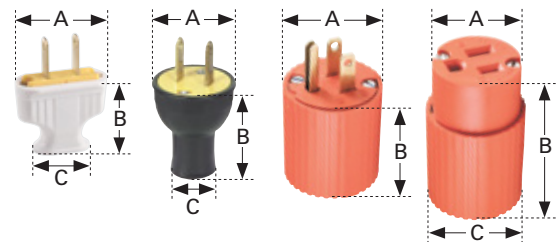

## Academy series plugs

Family	A	B	C	D	E	Cord Dia.
<b>Easy install plug</b>	1.16" (29.5mm)	1.37" (34.8mm)	0.75" (19.1mm)	0.62" (15.7mm)	0.75" (19.1mm)	0.33" (8.4mm)
<b>Super plug</b>	1.17" (29.7mm)	1.78" (45.2mm)	0.75" (19.1mm)	0.62" (15.7mm)	0.75" (19.1mm)	0.33" (8.4mm)

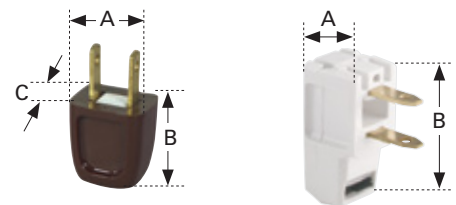

## Ceiling mount lampholders

Family	A	B	C
<b>Porcelain one piece</b>	4.50" (114.3mm)	1.50" (38.1mm)	1.70" (43.2mm)
<b>Porcelain two piece</b>	4.50" (114.3mm)	2.14" (54.4mm)	1.63" (41.4mm)
<b>Plastic one piece</b>	4.56" (115.8mm)	1.52" (38.6mm)	1.59" (40.4mm)
<b>Plastic two piece</b>	4.63" (117.6mm)	2.16" (54.9mm)	1.63" (41.4mm)

