


Wallplates & Weather Protective Covers

Our broad offering of wallplates are the final touch for any application and are available in standard size, mid-size and oversize. Choose from a variety of materials, colors, and configurations to match any combination of device and décor. Weather protective covers are available in a wide selection of configurations to maintain the integrity of outdoor devices.



**Standard size
wallplates**
C-10



Mid-size wallplates
C-17



Oversize wallplates
C-24



**Wallplate
accessories**
C-25



While-in-use boxes
C-28



**Weather protective
covers**
C-29


Wallplates

Our extensive line of wallplates is designed and manufactured to perform in a wide range of applications; no matter what you need, you'll find the desired material, configuration, size and color. Their heavy-duty construction provides outstanding performance throughout a home. Available in one- through six-gang configurations.




Wallplate families

Standard size
wallplates




C-10

Mid-size
wallplates



C-17

Oversize
wallplates




C-24

Wallplate
accessories



C-25

Wallplate colors



Almond



Black



Brown



Gray



Ivory



Lt. Almond



White



Brushed Bronze



Blue



Solid Brass




Red



Stainless Steel

- Mid-size screwless wallplates deliver the ultimate in designer looks with a screwless finish; they are fast and easy to install, virtually unbreakable and easy to clean
- Mid-size & oversize wallplates are designed for use in applications where additional wall coverage is needed
- Extra depth wallplates are available for use with old work outlet boxes for a flush fit to the wall
- Available wallplate materials include virtually unbreakable nylon & polycarbonate thermoplastics, 302/304 corrosion resistant stainless steel, brass, and thermoset
- Nylon & polycarbonate wallplates feature screw-catch, a timesaving feature that holds mounting screws captive to simplify installation
- Our wallplates are manufactured according to the performance & dimensional requirements of Federal Specification WP-455, NEMA Standard WD-1, UL Standard 514 and the NEC®

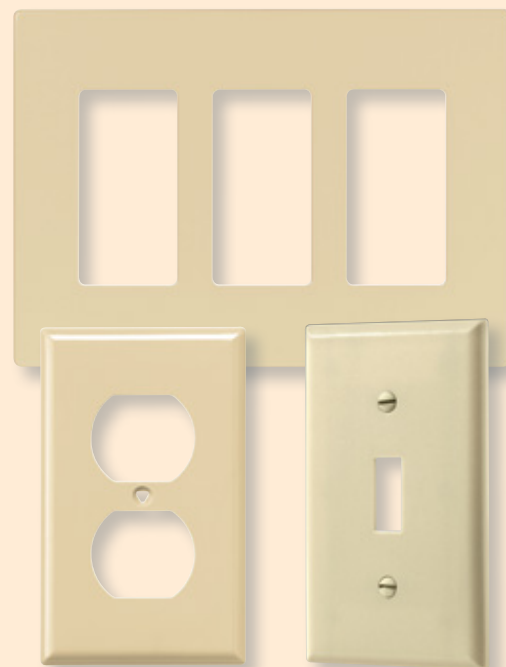

Specific wallplate solutions for today's needs



Aesthetic upgrade

Our screwless wallplates come in 3 different openings for upgrading the look of toggle switches, GFCIs, rotary dimmers and duplex receptacles without having to change out devices!

See pages C-17 to C-19

Shown:
PJS1



Corrosion resistance

Brass and stainless steel wallplates offer durable, elegant corrosion resistance making them ideal for high-moisture locations like kitchens, baths, garages and basements.

See pages C-10 to C-25

Shown:
93101



Impact resistance


Thermoplastic polycarbonate and nylon wallplates are virtually unbreakable, warp resistant, abrasion resistant and soil resistant, making them ideal for high-traffic areas.

See pages C-10 to C-26

Shown:
PJ26



Wallplate material information



Thermoplastic nylon or polycarbonate wallplates

Design features

- Rugged construction reduces installation cost due to less plate breakage and resists bowing to provide a smooth, flat installation
- Exclusive timesaving Screw-catch feature holds mounting screws captive and simplifies installation
- High gloss finish is soil resistant
- Polycarbonate wallplates are virtually unbreakable with high structural rigidity, long-term form retention, plus superior impact and abrasion resistance

- Nylon wallplates have a flush-fitting, warp resistant design
- Matching mounting screws provide

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1

Material characteristics

- Flammability: meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Thermoset wallplates

Design features

- Extensive line of non-flammable thermoset plates provides flush-fitting, warp resistant performance

Material characteristics

- Flammability: Meets UL94 requirements; 5V rated
- Temperature rating: -40°C to 65°C (-40°F to 149°F)

Testing & code compliance

- cULus listed to UL514C, file no. E33216, certified to CSA C22.2, no. 42.1



302/304 Stainless steel wallplates

Design features

- Superior non-corrosive and non-magnetic properties for applications needing protection from those elements
- Stainless steel alloy contains 18% chromium and 8% nickel for corrosion resistance
- Stamped from 0.032" (0.81mm) thick material
- Horizontally satin-brushed surface finish resists finger prints
- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation

- Matching stainless steel mounting screws provided

Testing & code compliance

- Listed to UL514D, file no. E92122, certified to CSA C22.2, no.42.1

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)



Brass wallplates

Design features

- Line of handsomely crafted, elegant solid brass designs in 11 popular NEMA standard size configurations
- Strong, corrosion resistant and coated with transparent lacquer to resist premature oxidation
- Horizontally satin-brushed surface finish resists fingerprints
- Matching brass-plated steel screws resist damage during installation

- All plates are coated with clear, removable PVC to safeguard the surface during handling and installation

- Solid brass material is a 70/30 alloy (#26C), .040" (1.02mm) thick

Testing & code compliance


- Listed to UL514D, file no. E92003

Material characteristics

- Temperature rating: -40°C to 70°C (-40°F to 158°F)


Compliances, specifications and availability are subject to change without notice.

Toggle




Gang	Standard size				Mid-size				Oversize	
	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-Gang	2134__	5134__	93071	94071	2034__	PJ1__	PJS1__	93971	2144__	93871
2-Gang	2139__	5139__	93072	94072	2039__	PJ2__	PJS2__	93972	2149__	93872
3-Gang	2141__	5141__	93073	94073	2041__	PJ3__	PJS3__	93973	2741__	93873
4-Gang	2154__	5154__	93074	—	2054__	PJ4__	PJS4__	—	—	93874
5-Gang	2155__	—	93075	—	—	PJ5__	—	—	—	—
6-Gang	2156__	—	93076	—	—	PJ6__	—	—	—	—

Decorator/GFCI




Gang	Standard size				Mid-size				Oversize	
	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-Gang	2151__	5151__	93401	94401	2051__	PJ26__	PJS26__	93934	2751__	93834
2-Gang	2152__	5152__	93402	94402	2052__	PJ262__	PJS262__	93935	—	—
3-Gang	2163__	—	93403	—	2063__	PJ263__	PJS263__	93936	—	—
4-Gang	2164__	—	93404	—	2064__	PJ264__	PJS264__	—	—	—
5-Gang	2165__	—	93405	—	—	PJ265__	PJS265__	—	—	—
6-Gang	2166__	—	93406	—	—	PJ266__	PJS266__	—	—	—

Duplex receptacle



Gang	Standard size				Mid-size				Oversize	
	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-Gang	2132__	5132__	93101	94101	2032__	PJ8__	PJS8__	93901	2142__	93801
2-Gang	2150__	5150__	93102	94102	2050__	PJ82__	—	93902	2750__	93802
3-Gang	—	—	93103	—	—	—	—	—	—	—

Blank




Gang	Standard size				Mid-size				Oversize	
	Thermoset	Nylon	Stainless steel	Brass	Thermoset	Polycarbonate	Screwless	Stainless steel	Thermoset	Stainless steel
1-Gang	2129__	5129__	93151	94151	2029__	PJ13__	—	93951	2729__	93851
2-Gang	2137__	5137__	93152	—	2037__	PJ23__	—	—	—	93852
3-Gang	—	—	93153	—	—	—	—	—	—	—
4-Gang	—	—	93154	—	—	—	—	—	—	—
1-strap mt.	—	—	—	—	—	PJ14__	—	—	—	—

Compliances, specifications and availability are subject to change without notice.


Standard size toggle switch wallplates

Product description


1-Gang, 2-Gang, 3-Gang,
4-Gang, 5-Gang, 6-Gang




1-Gang




2-Gang




3-Gang



4-Gang



5-Gang



6-Gang

Toggle switch

Gang	Material	Color suffix	Catalog no.		
1-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5134__	•	•
	Thermoset	A, B, LA, V, W	□ 2134__	•	•
	302/304 Stainless steel	—	□ 93071	•	•
	Brass	—	□ 94071	•	•
2-Gang	Nylon	A, B, BK, GY, LA, RD, V, W	□ 5139__	•	•
	Thermoset	A, B, LA, V, W	□ 2139__	•	•
	302/304 Stainless steel	—	□ 93072	•	•
	Brass	—	□ 94072	•	•
3-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5141__	•	•
	Thermoset	A, B, LA, V, W	□ 2141__	•	•
	302/304 Stainless steel	—	□ 93073	•	•
	Brass	—	□ 94073	•	•
4-Gang	Nylon	A, B, BK, GY, LA, V, W	□ 5154__	•	•
	Thermoset	A, B, LA, V, W	□ 2154__	•	•
	302/304 Stainless steel	—	□ 93074	•	•
5-Gang	Thermoset	A, B, LA, V, W	□ 2155__	•	•
	302/304 Stainless steel	—	□ 93075	•	•
6-Gang	Thermoset	A, B, V, W	□ 2156__	•	•
	302/304 Stainless steel	—	□ 93076	•	•

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White), Brass, Stainless Steel

							
A	B	BK	GY	LA	RD	V	W
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)
							
(Brass)	(Stainless Steel)						

Certification information: 2000 and 5000 series wallplates are cULus certified; 93000 series wallplates are UL and CSA certified; 94000 are UL certified **Dimensional information:** C-5, C-6 **Specification information:** Please visit www.eaton.com/wiringdevices
Compliances, specifications and availability are subject to change without notice.

 Indicates NAFTA compliant - Page G-21

 RoHS compliant - Page G-21