


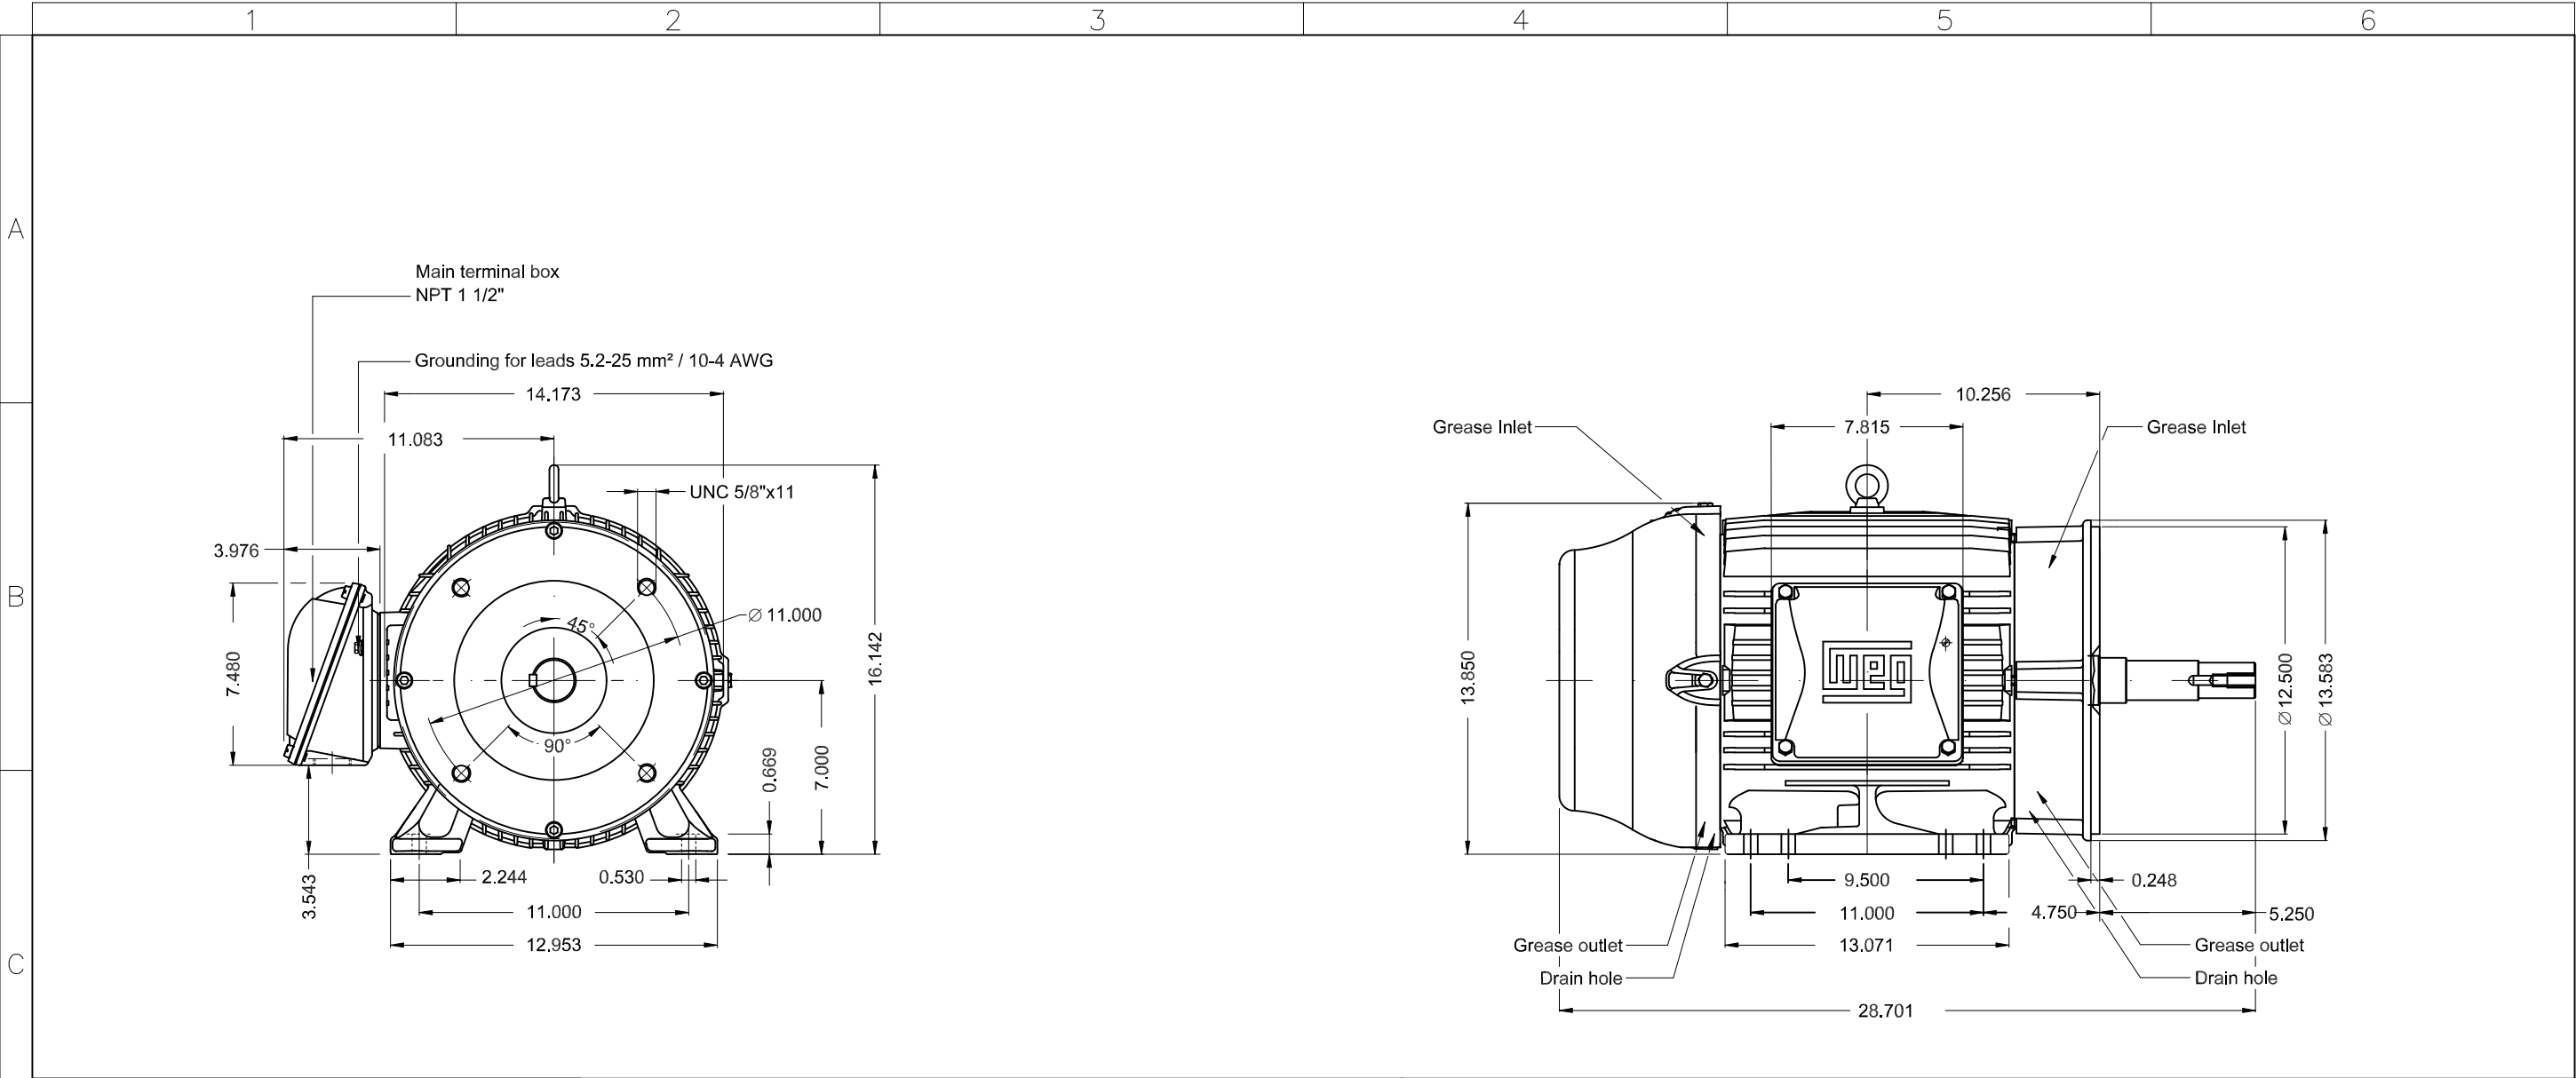

D	Plastic fan											
	Without vertical jackscrews											
	Without switch off thermal protection											
	Grease - Mobil Polyrex EM											
	Plastic flat plug											
	Class F insulation - 80K temperature rise											
	Without Space Heaters											
	Shaft material - SAE/ABNT 1040/45											
	Rotation CW and CCW											
	Dipping impregnation - polyester											
E	Without terminal block											
	Cast iron fan cover											
	C3 NDE bearing											
	Bearing cap											
	Without epoxi in the cables outlet											
	A key											
	Packing - crate											
	Standard balancing with half key											
	Without thermal protection on bearings											
	With grease fitting											
C3 DE bearing												
Color RAL 5009												
Painting plan 203A												
Mounting NEMA F-1												
Mounting B34R(D)												

25 HP 02 Poles 50 Hz											A	
						HYBRISUSER				00		
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER		
EXECUTED	HYBRISUSER					THREE PH. MOTOR JM/JP/JET PUMP W22 HIGH EFF. FRAME 284/6JM IP55 TEFC				PREVIEW WDD 00		
CHECKED												
RELEASED												
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1						