



CAC C-TYPE standard version

| inserts | | page: |
|------------|-------------------------------|-----------|
| CD | 40 poles + ⊕ | 70 |
| CDD | 72 poles + ⊕ | 79 |
| CDS | 27 poles + ⊕ | - |
| CDSH | 27 poles + ⊕ | 88 |
| CNE | 16 poles + ⊕ | 112 |
| CSE | 16 poles + ⊕ | - |
| CSH | 16 poles + ⊕ | 112 |
| CSH S | 16 poles + ⊕ | 124 |
| CCE | 16 poles + ⊕ | 132 |
| CMSH, CMCE | 6+2 (aux) poles + ⊕ | 138 - 139 |
| CSS | 16 poles + ⊕ | 150 |
| CQE | 32 poles + ⊕ | 170 |
| CQEE | 40 poles + ⊕ | 176 |
| CP | 6 poles + ⊕ | 178 |
| CX | 6/12, 6/36 and 12/2 poles + ⊕ | 197 - 199 |
| CX | 4/0 and 4/2 poles + ⊕ | 200 - 201 |
| MIXO | 4 modules | 262 - 317 |

hoods without entry, to be drilled



hoods without entry, to be drilled



| description | part No. (with 4 pegs) | part No. (with 2 pegs) |
|-------------|---------------------------|---------------------------|
|-------------|---------------------------|---------------------------|

with pegs, high construction


CAC 16

CAC 16 L


Alternatively, hoods with pegs may be coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- C7, IP66/IP67/IP69 stainless steel lever, page 439
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455

CAC 16 ●

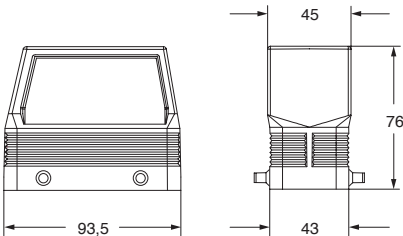

CAC 16 L ▲

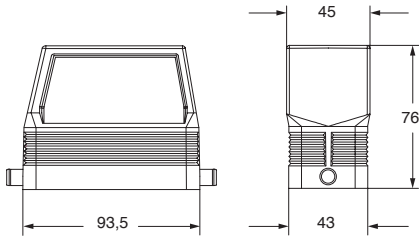

CALUS[®] Type 4/4X/12



● IP67 if coupled with IP67 housings