
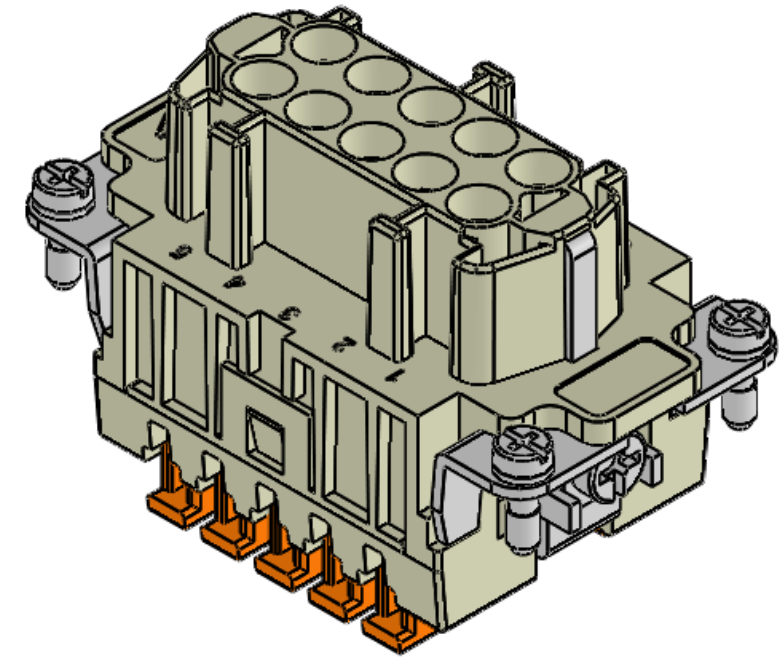
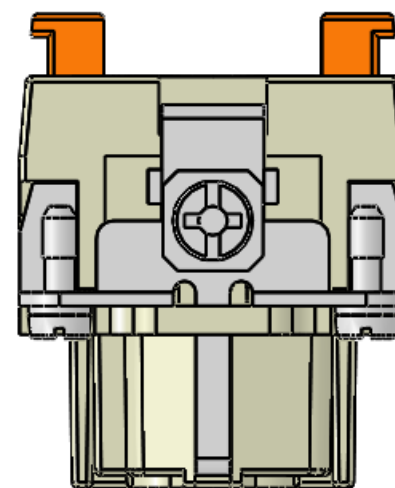
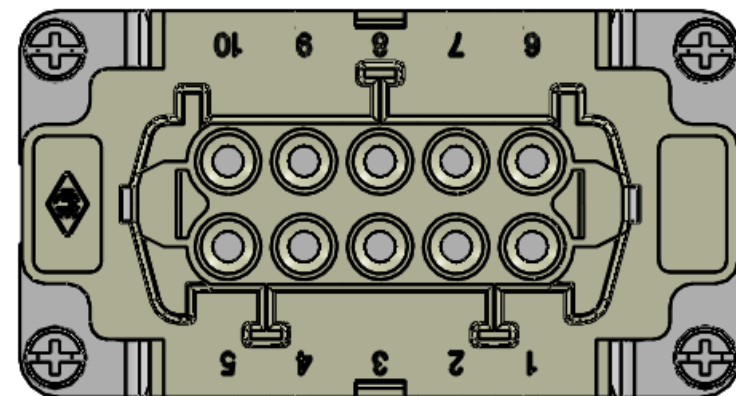
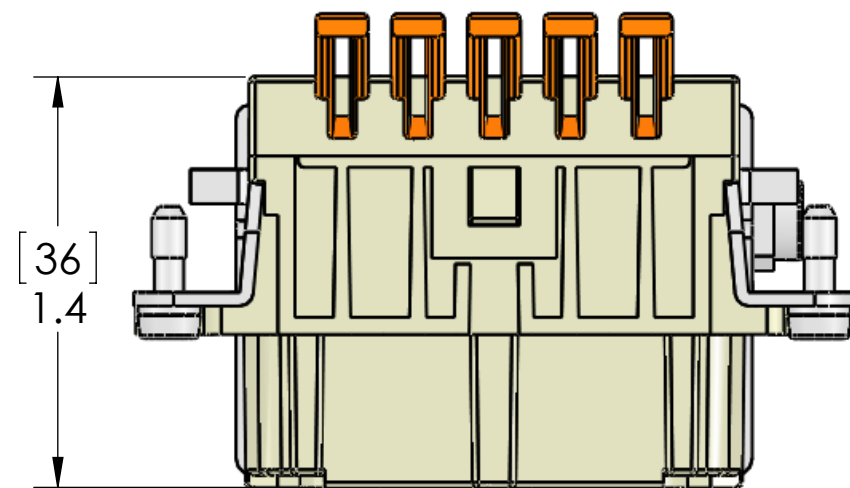


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	10/16/2012	DCT

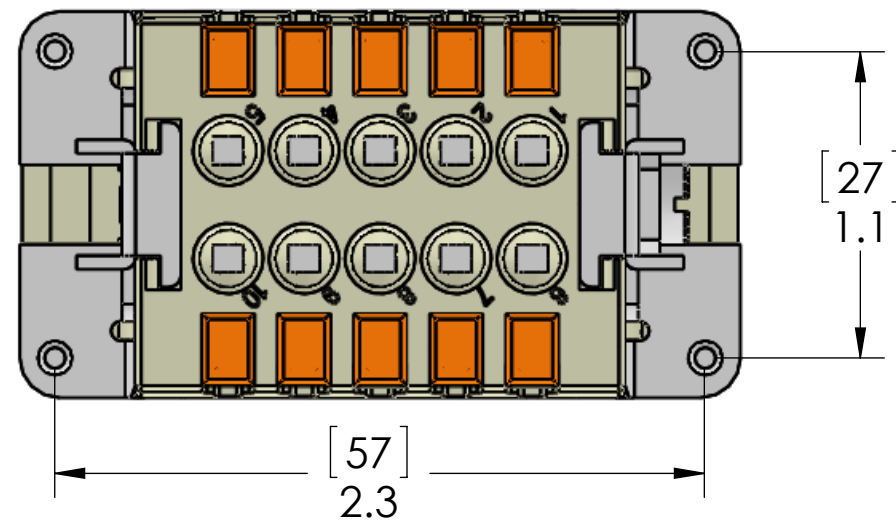

Connection made via spring clamp.

To use: Strip Wires 0.35" - 0.43" (9 - 11mm)
Placed stripped wire into opening and
press down on orange tab. This will lock the wire
into place. Proceed to next terminal.
(ferruled wires may be used as well)

Acceptable wire AWG: 14 - 24AWG [2.5 - 0.25 sqmm]

MATERIALS	
HOUSING:	GLASS REINFORCED THERMOPLASTIC
	NICKEL PLATED BRASS HARDWARE
CONTACTS:	SILVER PLATED COPPER ALLOY
SCREWS:	NICKEL PLATED STEEL
RATINGS:	UL / CSA - 600V, 16A. EN 500V/6kV/3, 16A
TEMP:	-40°C - +125°C ambient
APPROVALS:	UL, CSA, & CCC

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

			UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION							
			DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	JJH								
				CHECKED									
				ENG APPR.									
				MFG APPR.									
				Q.A.		TITLE: 10 PL SQUICH FEM INSERT							
				COMMENTS:									
			MATERIAL						SIZE	DWG. NO.			REV
			FINISH						B	CSHF-10			A
			DO NOT SCALE DRAWING						SCALE: 3:2		WEIGHT:		SHEET 1 OF 1