
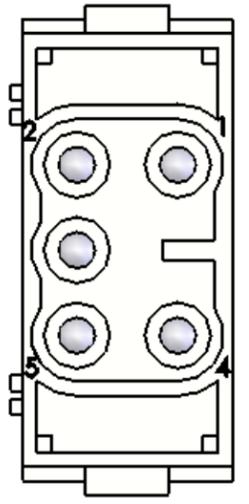
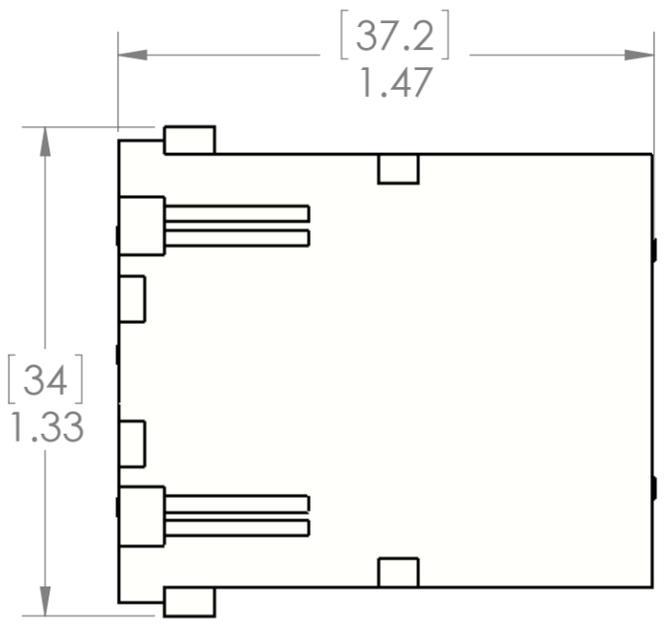
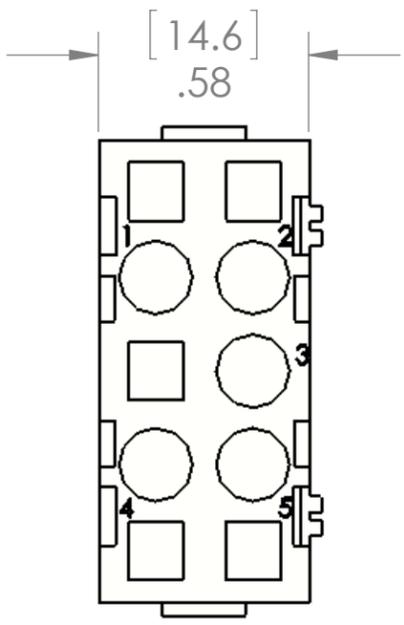


8 7 6 5 4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	DRAWN IN SW	1/8/2014	JJH

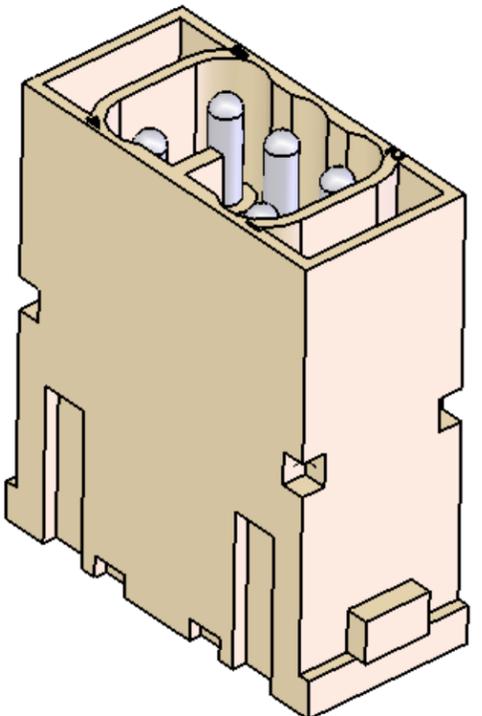

D

D

C

C

B

B

A

A

MATERIALS AND SPECIFICATIONS	
HOUSING:	GLASS REINFORCED THERMOPLASTIC
CONTACTS:	SILVER PLATED
TEMPERATURE:	-40°C to +125°C
RATINGS:	UL - 600V, 16A. EN 400V/6kV/3, 16A
WIRE RANGE:	26-14AWG (0.14-2.5mm ²)
STRIP LENGTH:	9-11mm
APPROVALS:	UL, CSA, CCC, GL, GOST

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

NAME	
DRAWN	RSC
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION		
TITLE:		
5 PL MIXO SPRING CLAMP MALE		
SIZE	DWG. NO.	REV
B	CX-05SM	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1