

CX 12 DF/DM 12 poles 10A - 250V


The modular inserts must be installed in suitable frames which are then mounted in traditional enclosures* or in COB panel support.
Single-sized modular units may be directly mounted inside MIXO ONE enclosures.

frames for modular units* page: 316 - 317

MIXO ONE enclosures 369

* enclosures: bulkhead mounting housings, high construction housings or high construction hoods

modular units,
crimp connections



RATING 250V

10A crimp contacts,
silver and gold plated



description	part No.	part No
-------------	----------	---------

without contacts (to be ordered separately)
female inserts for female contacts
male inserts for male contacts

CX 12 CF
CX 12 DM

10A female crimp contacts		
0,14-0,37 mm ²	AWG 26-22	identification No. 1
0,5 mm ²	AWG 20	identification No. 2
0,75 mm ²	AWG 18	identification No. ②
1 mm ²	AWG 18	identification No. 3
1,5 mm ²	AWG 16	identification No. 4
2,5 mm ²	AWG 14	identification No. 5

CDFA 0.3	CDFD 0.3
CDFA 0.5	CDFD 0.5
CDFA 0.7	CDFD 0.7
CDFA 1.0	CDFD 1.0
CDFA 1.5	CDFD 1.5
CDFA 2.5	CDFD 2.5



silver plated

gold plated+


10A male crimp contacts		
0,14-0,37 mm ²	AWG 26-22	identification No. 1
0,5 mm ²	AWG 20	identification No. 2
0,75 mm ²	AWG 18	identification No. ②
1 mm ²	AWG 18	identification No. 3
1,5 mm ²	AWG 16	identification No. 4
2,5 mm ²	AWG 14	identification No. 5

CDMA 0.3	CDMD 0.3
CDMA 0.5	CDMD 0.5
CDMA 0.7	CDMD 0.7
CDMA 1.0	CDMD 1.0
CDMA 1.5	CDMD 1.5
CDMA 2.5	CDMD 2.5

- characteristics according to EN 61984:
10A 250V 4kV 3
- certified
- rated voltage according to UL/CSA: 600V
- insulation resistance: ≥ 10 GΩ
- ambient temperature limit: -40 °C ... +125 °C
- made of self-extinguishing thermoplastic resin UL 94V-0
- mechanical life: ≥ 500 cycles
- contact resistance: ≤ 3 mΩ
- PCBs interface, refer to article CIF 2.4 on page 670
- **it is recommended to crimp the contacts with crimping tools homologated by ILME** (please see the crimping tool section 10A contacts, CDF and CDM series) on pages 708 - 741
- for max. current load see the connector inserts derating diagram below; for more information see page 28

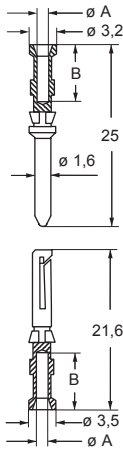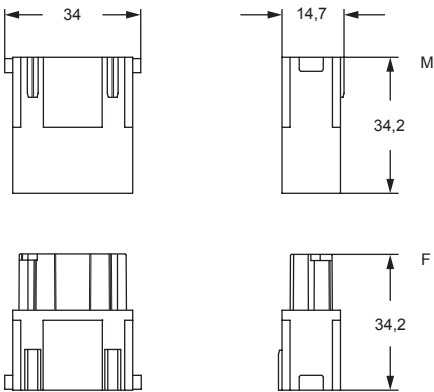


CX 12 D, 12 poles connector inserts
Maximum current load derating diagram

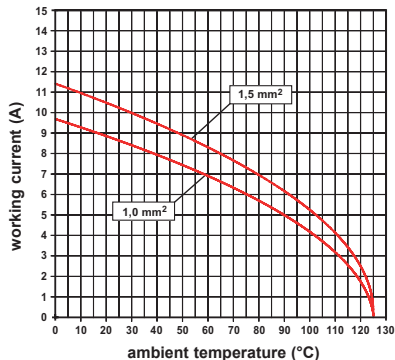

contacts side (front view)

side with reference arrow ▲



- 1 frame slot

CDF and CDM contacts		
conductor section (mm ²)	conductor slot ø A (mm)	conductors stripping length B (mm)
0,14-0,37	0,9	8
0,5	1,1	8
0,75	1,3	8
1,0	1,45	8
1,5	1,8	8
2,5	2,2	6

+ for basic or high thickness gold plating, please refer to page 674