


AUSTRALIA, NEW ZEALAND 15A-250V TYPE I OUTLET
AS/NZS 3112, AS/NZS 4417, (AU2-15R)
NOTE: OUTLET ACCEPTS 10A and 15A
AUSTRALIAN / NEW ZEALAND PLUGS

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

PANEL CUTOUT

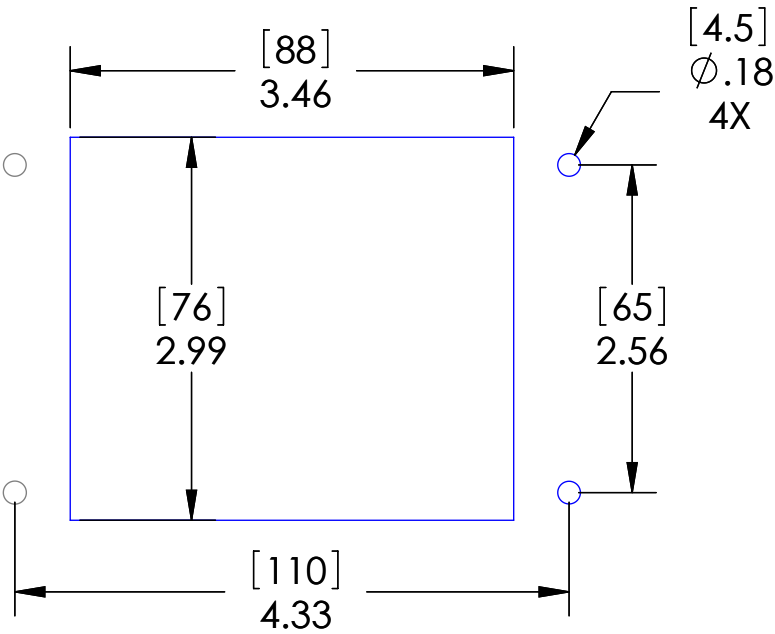

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

PIC RATINGS/SPECIFICATIONS			
VOLTS:	250V		
AMPS:	15A		
NEMA/UL EN 60529:	4, 4X, 12 IP65		
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)		
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)		
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG		
WIRE STRIP LENGTH:	10 ~ 11 mm		

OPERATING TEMPERATURE: (-5°C / +50° C (+23° F / +122° F))

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	07/13/2021
	CHECKED BY	DCG
	CHECK DATE	07/16/2021
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

MENCOM CORPORATION

TITLE:
AUS 15A RCPT, RJ45; 32

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED

CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

SIZE	DWG. NO.	REV
B	DAS-RJ45-NR-32	C
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1