
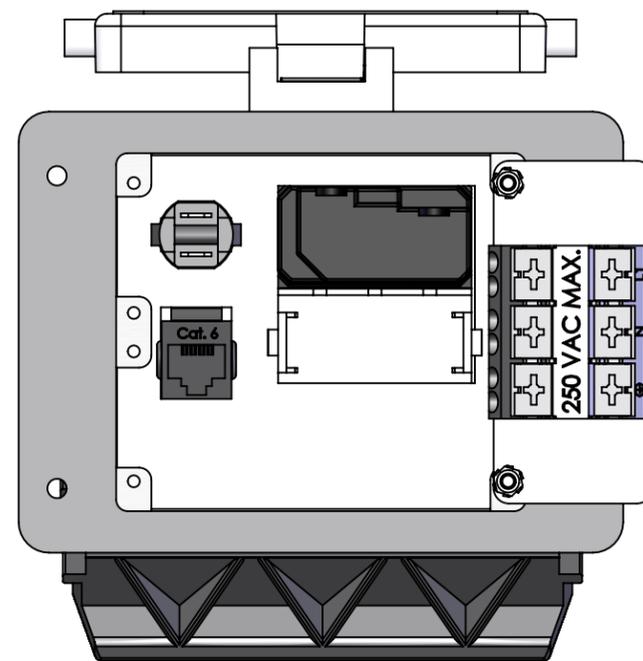
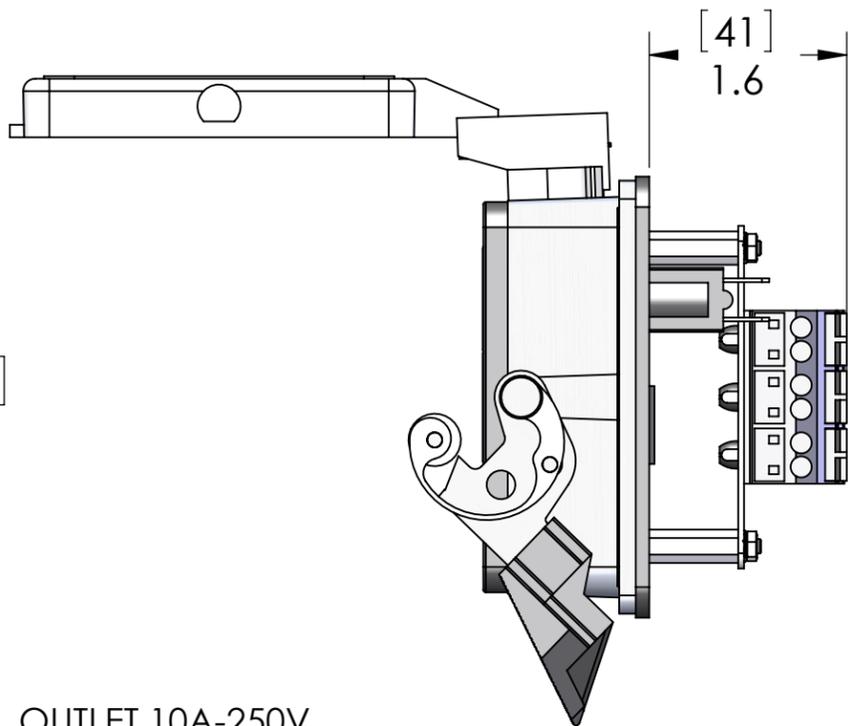


8 7 6 5 4 3 2 1


D
C
B
A

D
C
B
A

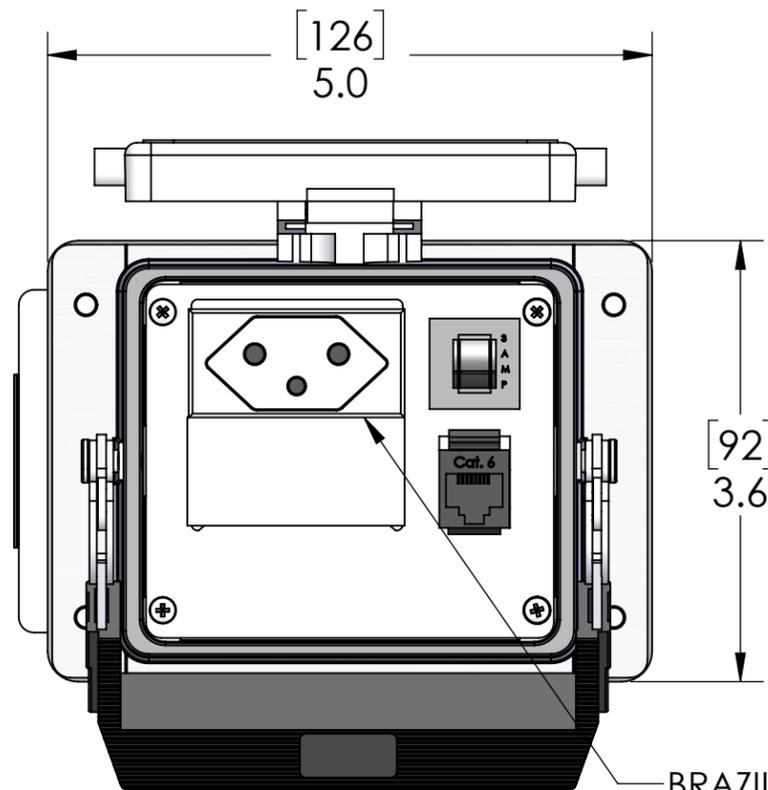

BRAZIL OUTLET 10A-250V, (BR2-10R), NBR14136-2002

PANEL CUTOUT

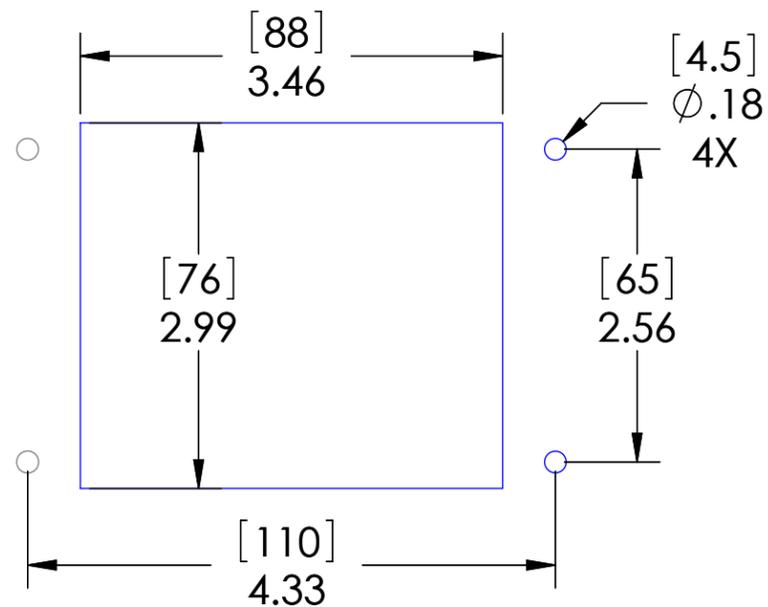

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

HOUSING MATERIALS		PIC RATINGS/SPECIFICATIONS	
BODY:	EPOXY COATED DIE CAST ALUMINUM	VOLTS:	250V
GASKET:	THERMOPLASTIC ELASTOMER	AMPS:	3A
HANDLE:	POLYAMIDE	NEMA/UL EN 60529:	4, 4X, 12 IP65
LEVERS:	STAINLESS STEEL	MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
OPERATING TEMPERATURE: (-5°C / +50° C (+23° F / +122° F))		MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT		INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
P/N: D-PIC-MT		WIRE STRIP LENGTH:	10 ~ 11 mm

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

DO NOT SCALE DRAWING

DRAWN BY: DCG		MENCOM CORPORATION		
DRAWN DATE: 07/14/2021				
CHECKED BY: DCG				
CHECK DATE: 07/16/2021		TITLE: BRAZ 10A RECPT; RJ45; 3A; 32		
COMMENTS:		SIZE: B	DWG. NO.: DBR22-10A-RJ45-R-32	REV: D
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1		

8 7 6 5 4 3 2 1