



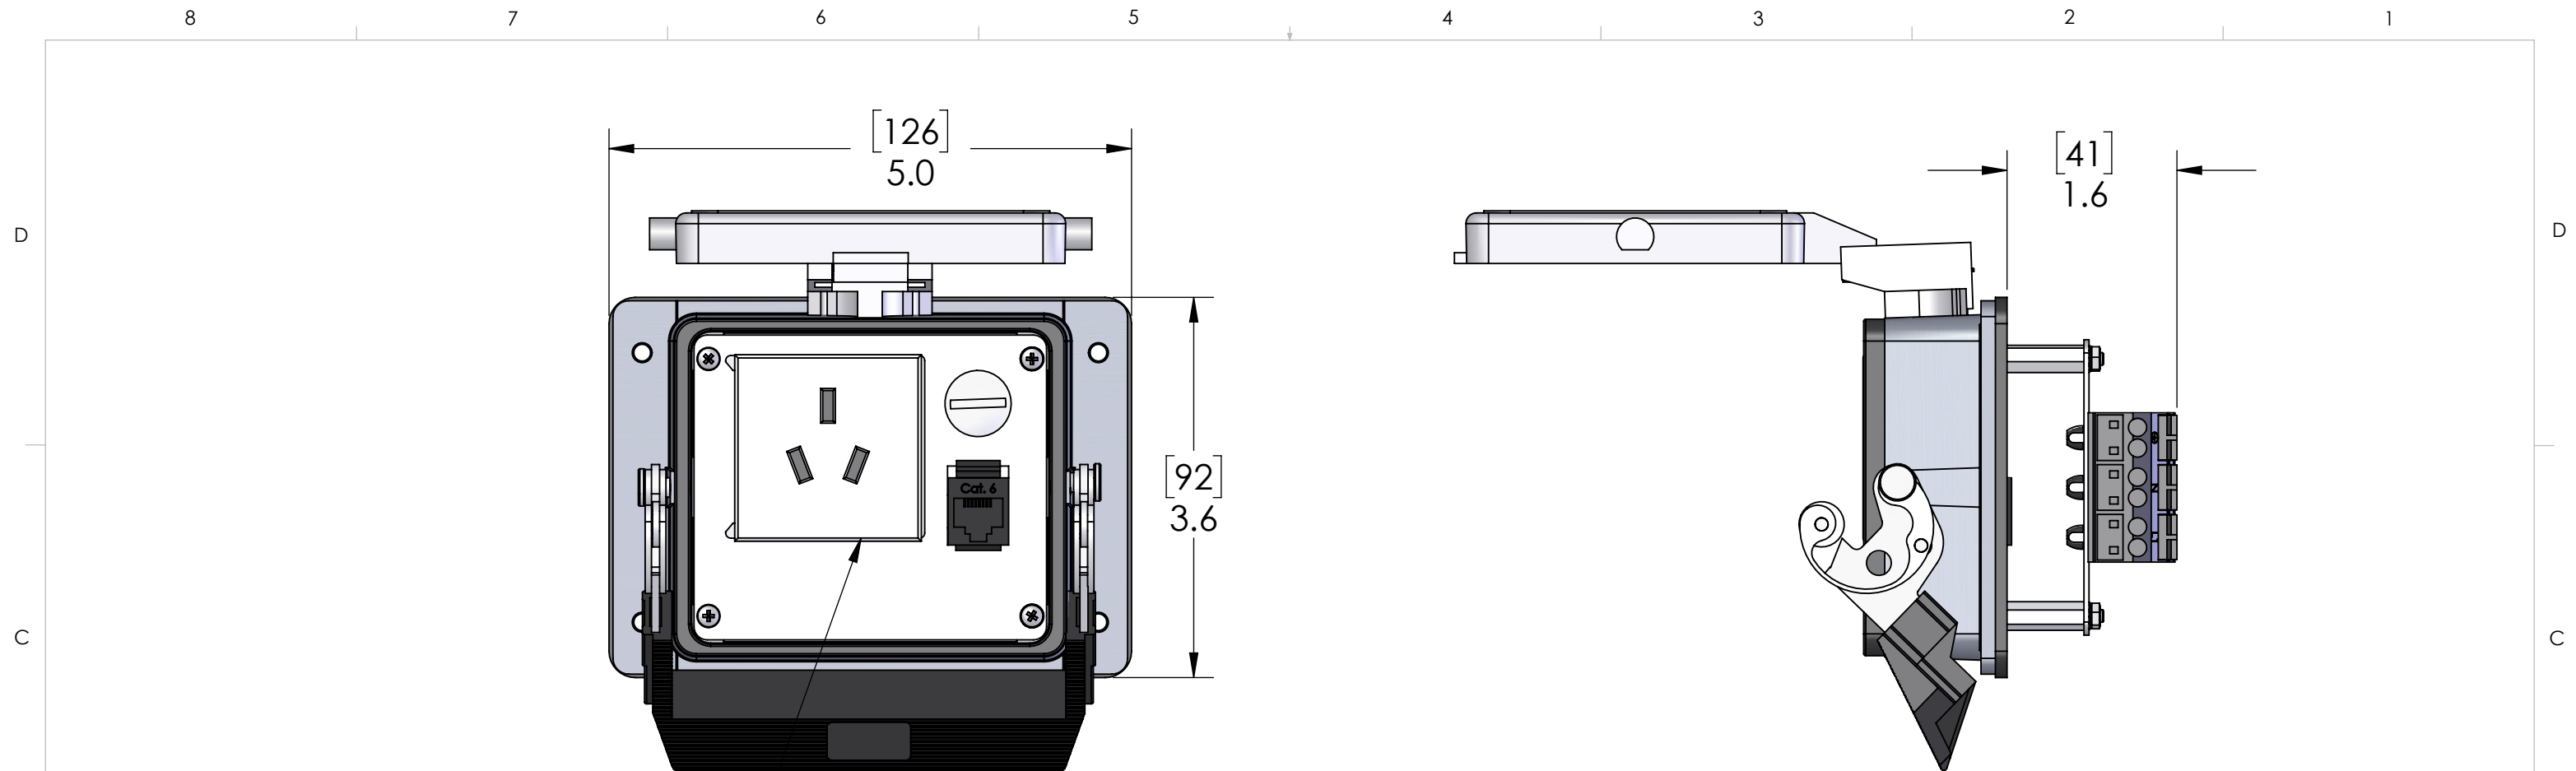

CHINESE RECEPTACLE 10A, 250V, CCC CERTIFICATION

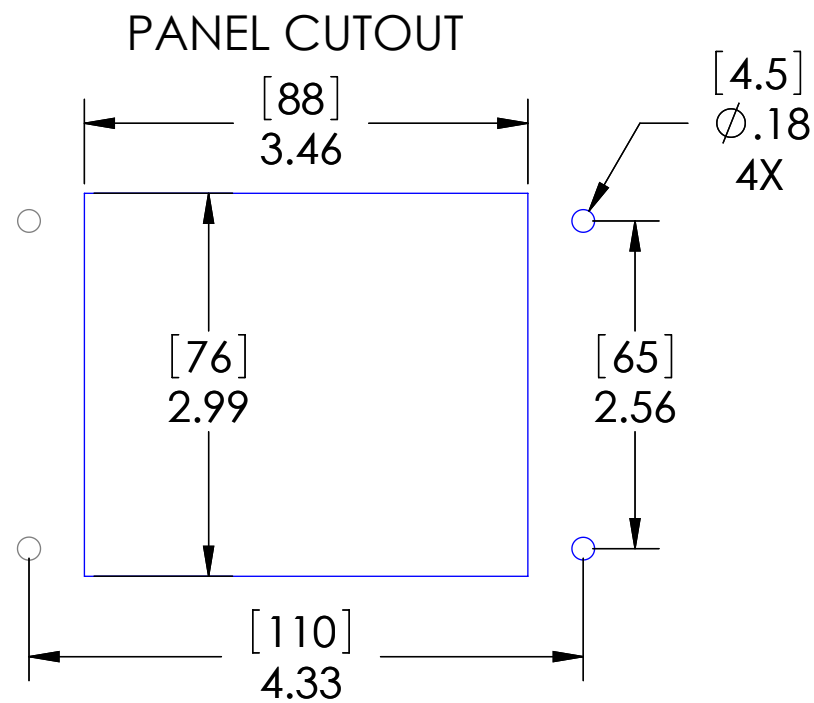

A device employing a 15 A or 20 A grounding type receptacle but no supplementary protector shall be protected by a fuse or circuit breaker that does not exceed the marked rating of the receptacle in the end use. When a fuse or circuit breaker rated less than the receptacle's rating is provided, a Marking shall be provided to indicate the maximum ampere rating of the protection provided.

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

	HOUSING MATERIALS	AMPS:	10A
BODY:	EPOXY COATED DIE CAST ALUMINUM	NEMA/UL EN 60529:	4, 4X, 12 IP65
		MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
GASKET:	THERMOPLASTIC ELASTOMER	MOUNTING SCREW TORQUE:	1.2~1.8N·m (0.9~1.3 Lb·Ft)
HANDLE:	POLYAMIDE	INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
LEVERS:	STAINLESS STEEL	WIRE STRIP LENGTH:	10 ~ 11 mm

MOUNTING KIT ORDERED
SEPARATELY CONTAINS
M4x0.7 SS SCREW, NYLON WASHER,
SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT 6 JACK	CAT 6 JACK

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

RED IS LON WASHER, ND M4 NUT		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]		DRAWN BY		DCG		MENCOM CORPORATION TITLE: CHI 10A RCP; RJ; SZ 32			
				DRAWN DATE		07/23/2019					
				CHECKED BY		DCG					
				CHECK DATE		07/23/2019					
				COMMENTS:							
		MATERIAL				SIZE		DWG. NO.		REV	
		FINISH				B		DCH1-RJ45-32		F	
		DO NOT SCALE DRAWING				SCALE: 2:3		WEIGHT:		SHEET 1 OF 1	