


—USB CONFIGURED  
TYPE B FEMALE EXTERIOR/  
TYPE A FEMALE INTERIOR

## PANEL CUTOUT

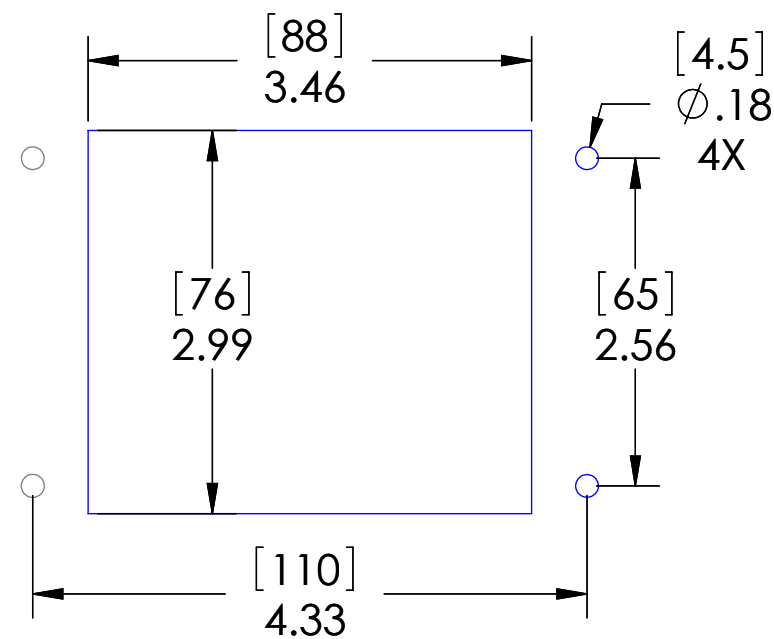

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED		
CONN. TYPE	EXTERIOR	INTERIOR
RJ45	CAT. 6 JACK	CAT. 6 JACK

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**




HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

PIC RATINGS/SPECIFICATIONS	
VOLTS:	125V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL   EN 60529:	4, 4X, 12   IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

D:	DRAWN BY	DCG	<h1 style="text-align: center;">MENCOM CORPORATION</h1> <div style="text-align: center;"> <p>TITLE:</p> <h2 style="margin: 0;">DPLX; RJ45; USB-BA; 3A; 32</h2> </div>		
	DRAWN DATE	03/08/2019			
	CHECKED BY	DCG			
	CHECK DATE	03/11/2019			
	COMMENTS:		SIZE <b>B</b>	DWG. NO. DP-RJ45-USB-BFAF-R-32	REV <b>F</b>
			SCALE: 2:3	WEIGHT:	SHEET 1 OF 1

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

RED		UNLESS OTHERWISE SPECIFIED
NS		DIMENSIONS ARE IN INCHES AND [MM]
LON WASHER,		
AND M4 NUT		
		MATERIAL
		FINISH
		DO NOT SCALE DRAWING