


EUROPEAN SCHUKO RECPT  
16A, 250V, EU1-16R

PANEL CUTOUT

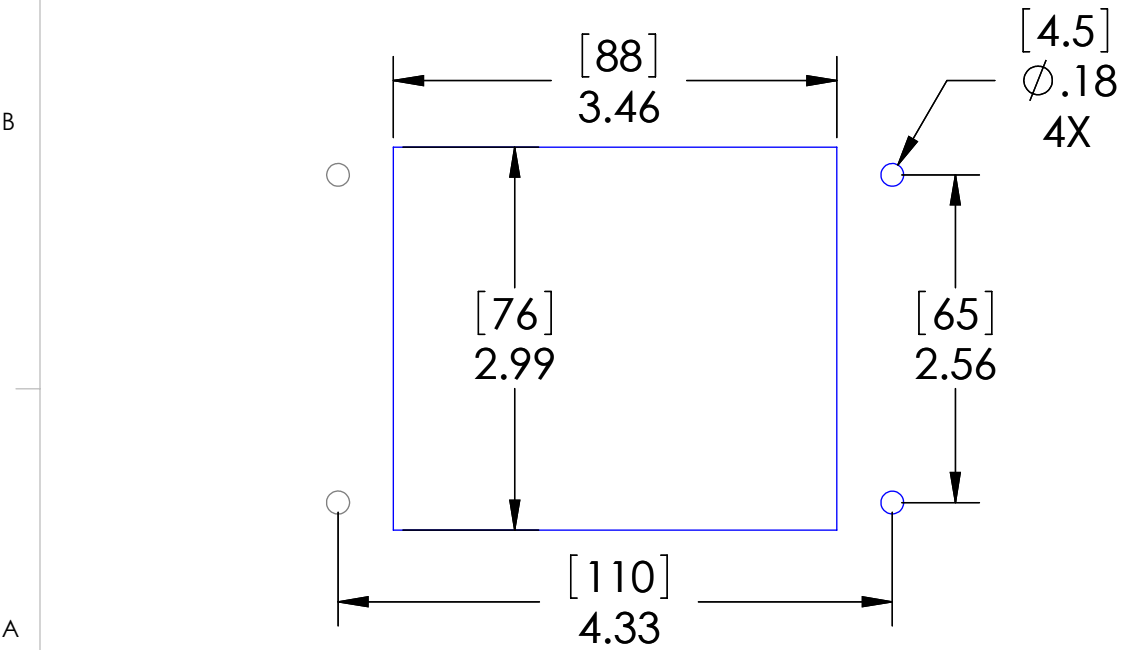

These devices shall be mounted on enclosures having adequate strength and thickness and with adequate spacing provided. Seal rating is based on mounting to a surface that is clean, flat and smooth.

| HOUSING MATERIALS  |                                | PIC RATINGS/SPECIFICATIONS         |                                 |
|--|--------------------------------|------------------------------------|---------------------------------|
| BODY:  | EPOXY COATED DIE CAST ALUMINUM | VOLTS:                             | 250V                            |
| GASKET:  | THERMOPLASTIC ELASTOMER        | AMPS:                              | 3A                              |
| HANDLE:  | POLYAMIDE                      | SCCR:                              | 0.2kA                           |
| LEVERS:  | STAINLESS STEEL                | NEMA/UL   EN 60529:                | 4, 4X, 12   IP65                |
| UNLESS OTHERWISE SPECIFIED:<br>DIMENSIONS ARE IN INCHES AND [MM] |                                | MOUNTING SCREW SIZE:               | M4 (8-32) (304 or 316SS for 4X) |
|  |                                | MOUNTING SCREW TORQUE:             | 1.2~1.8N-m (0.9~1.3 Lb-Ft)      |
|  |                                | INCOMING POWER WIRE SIZE:          | 0.5 ~ 4.0 sq mm / 20-12AWG      |
|  |                                | WIRE STRIP LENGTH:                 | 10 ~ 11 mm                      |
| MATERIAL   |                                | DRAWN BY                           | DCG                             |
|  |                                | DRAWN DATE                         | 03/20/2019                      |
|  |                                | CHECKED BY                         | GO                              |
|  |                                | CHECK DATE                         | 03/20/2019                      |
| FINISH   |                                | COMMENTS:                          |                                 |
|  |                                |                                    |                                 |
|  |                                |                                    |                                 |
|  |                                |                                    |                                 |
| DO NOT SCALE DRAWING   |                                | MENCOM CORPORATION                 |                                 |
|  |                                | TITLE:                             |                                 |
|  |                                | EURO (SCHUKO) RCPT; 2 RJ45; 3A; 32 |                                 |
|  |                                |                                    |                                 |
|  |                                | SIZE                               | DWG. NO.                        |
|  |                                | B                                  | EP-2RJ45-R-32                   |
|  |                                | SCALE: 2:3                         | WEIGHT:                         |
|  |                                |                                    |                                 |
|  |                                | REV                                |                                 |
|  |                                | E                                  |                                 |
|  |                                | SHEET 1 OF 1                       |                                 |
|  |                                |                                    |                                 |

MOUNTING KIT ORDERED  
SEPARATELY CONTAINS  
M4x0.7 SS SCREW, NYLON WASHER,  
SPLIT LOCKWASHER AND M4 NUT  
**P/N: D-PIC-MT**

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS  
DRAWING IS THE SOLE PROPERTY OF  
MENCOM CORPORATION. ANY  
REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF  
MENCOM CORPORATION IS  
PROHIBITED.

| STANDARD CONFIGURATIONS UNLESS OTHERWISE NOTED |            |            |
|--|------------|------------|
| CONN. TYPE                                     | EXTERIOR   | INTERIOR   |
| RJ45   | CAT 6 JACK | CAT 6 JACK |