
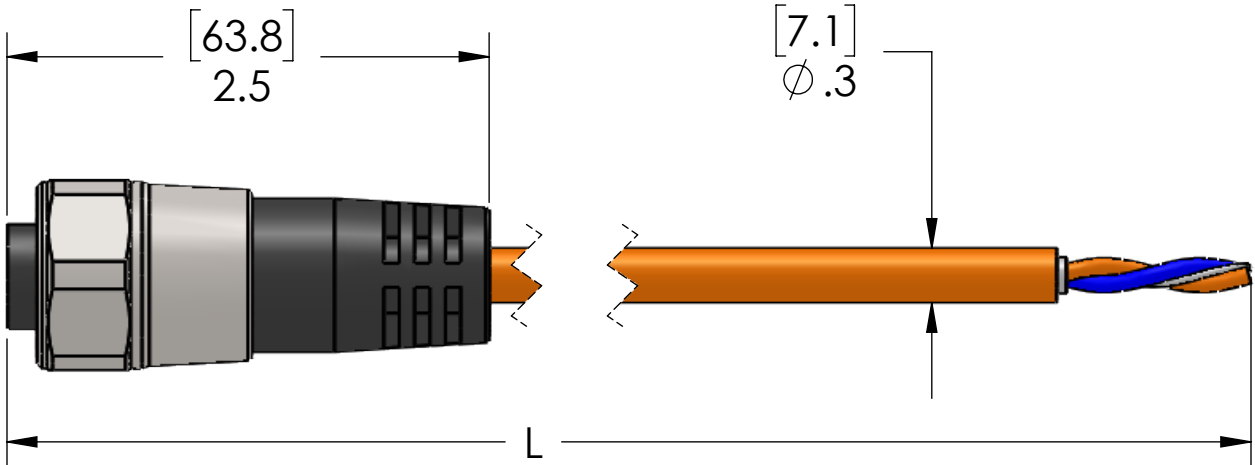


PIN #	COLOR
1	BLUE (-)
2	ORANGE (+)
3	DRAIN
4	N/C

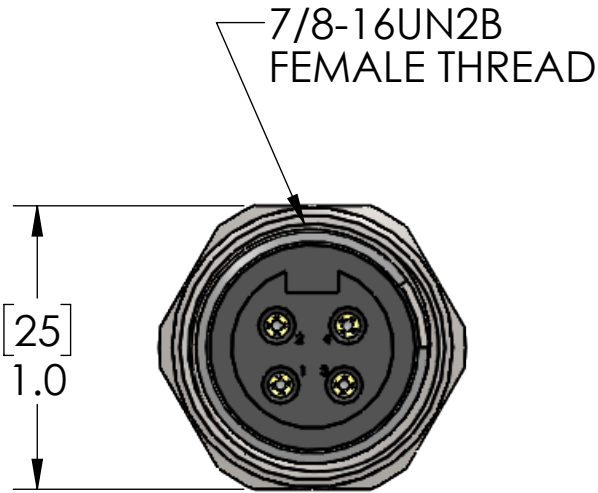

MATERIALS:		
CABLE:	CONSTRUCTION:	18/2 STRANDED WIRE, FOIL SHIELD WITH 22AWG DRAIN WIRE. ORANGE PVC JACKETING
	RATINGS:	UL ITC-ER, SUN RES, PLTC-ER, 105°C, -40°C OR CSA CMX-OUTDOOR-CMG 105°C OR AWM 1/II A/B 105°C 600V FT4, OR IEC 332
	ELEC SPEC:	FOUNDATION FIELDBUS H1 TYPE A FF-844 REGISTERED
		CHARACTERISTIC IMPEDANCE: 100 +/- 10 Ohms
		COND TO COND CAPACITANCE: 20pF/Ft nom.
		INDUCTANCE: 0.22 micro Henry/Ft nom.
		DC RESISTANCE: 7.06 Ohms/1000' MAX (6.5 Ohms nom.)
		DIELECTRIC WITHSTANDING VOLTAGE: 1.5 KVAC
BODY:	BLACK PVC	
CONTACTS:	GOLD PLATED COPPER ALLOY	
COUPLINGS:	STAINLESS STEEL	

CERTIFICATIONS:	
U.S.:	UL LISTED
CANADA:	C-UL LISTED
RoHS:	YES
CE:	YES

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	10A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	07/09/2019
	CHECKED BY	ADM
	CHECK DATE	07/09/2019
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

TABLE A	
P/N	L
FFIN-4FPX-1M-SS	40" [1M]
FFIN-4FPX-2M-SS	79" [2M]
FFIN-4FPX-3M-SS	118" [3M]
FFIN-4FPX-4M-SS	157" [4M]
FFIN-4FPX-5M-SS	197" [5M]
FFIN-4FPX-6M-SS	236" [6M]
FFIN-4FPX-8M-SS	315" [8M]
FFIN-4FPX-10M-SS	393" [10M]
FFIN-4FPX-15M-SS	590" [15M]
FFIN-4FPX-20M-SS	786" [20M]
FFIN-4FPX-25M-SS	983" [25M]
FFIN-4FPX-30M-SS	1179" [30M]

MENCOM CORPORATION

TITLE:  
FNDTN FLBS MIN CBL SS

SIZE	DWG. NO.	REV
B	FFIN-4FPX-ZZ-SS	B
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1