




WIRING	
Terminal Block	Port / Pin
P1 / 1	Port 1 / Pin 1
P1 / 2	Port 1 / Pin 2
P1 / 3	Port 1 / Pin 3
P1 / 4	Port 1 / Pin 4
P2 / 1	Port 2 / Pin 1
P2 / 2	Port 2 / Pin 2
P2 / 3	Port 2 / Pin 3
P2 / 4	Port 2 / Pin 4
P3 / 1	Port 3 / Pin 1
P3 / 2	Port 3 / Pin 2
P3 / 3	Port 3 / Pin 3
P3 / 4	Port 3 / Pin 4
P4 / 1	Port 4 / Pin 1
P4 / 2	Port 4 / Pin 2
P4 / 3	Port 4 / Pin 3
P4 / 4	Port 4 / Pin 4
P5 / 1	Port 5 / Pin 1
P5 / 2	Port 5 / Pin 2
P5 / 3	Port 5 / Pin 3
P5 / 4	Port 5 / Pin 4
P5 / GND	ALL Ports Pin 5
P6 / 1	Port 6 / Pin 1
P6 / 2	Port 6 / Pin 2
P6 / 3	Port 6 / Pin 3
P6 / 4	Port 6 / Pin 4

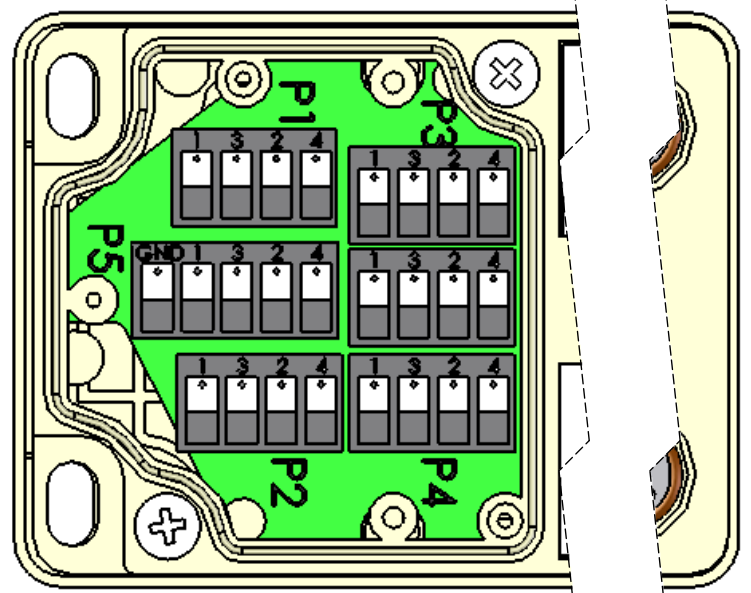


WIRING CHAMBER
(CONNECTIONS MADE
VIA SPRING CLAMP
TERMINAL BLOCKS)

ACCEPTABLE CABLE
DIAMETERS: 5 - 13mm

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	Released	10/29/2008	
B	redesigned block area	12/10/2009	

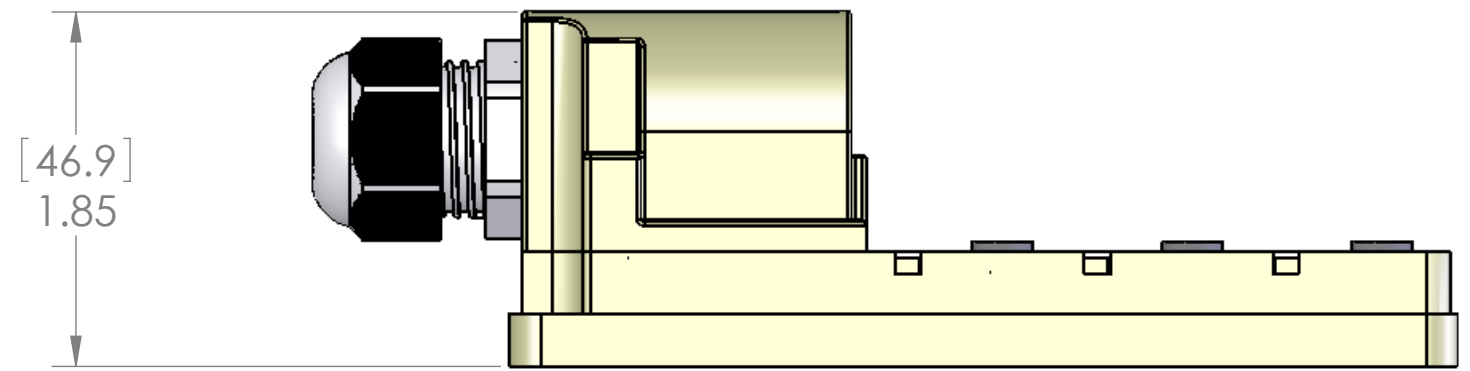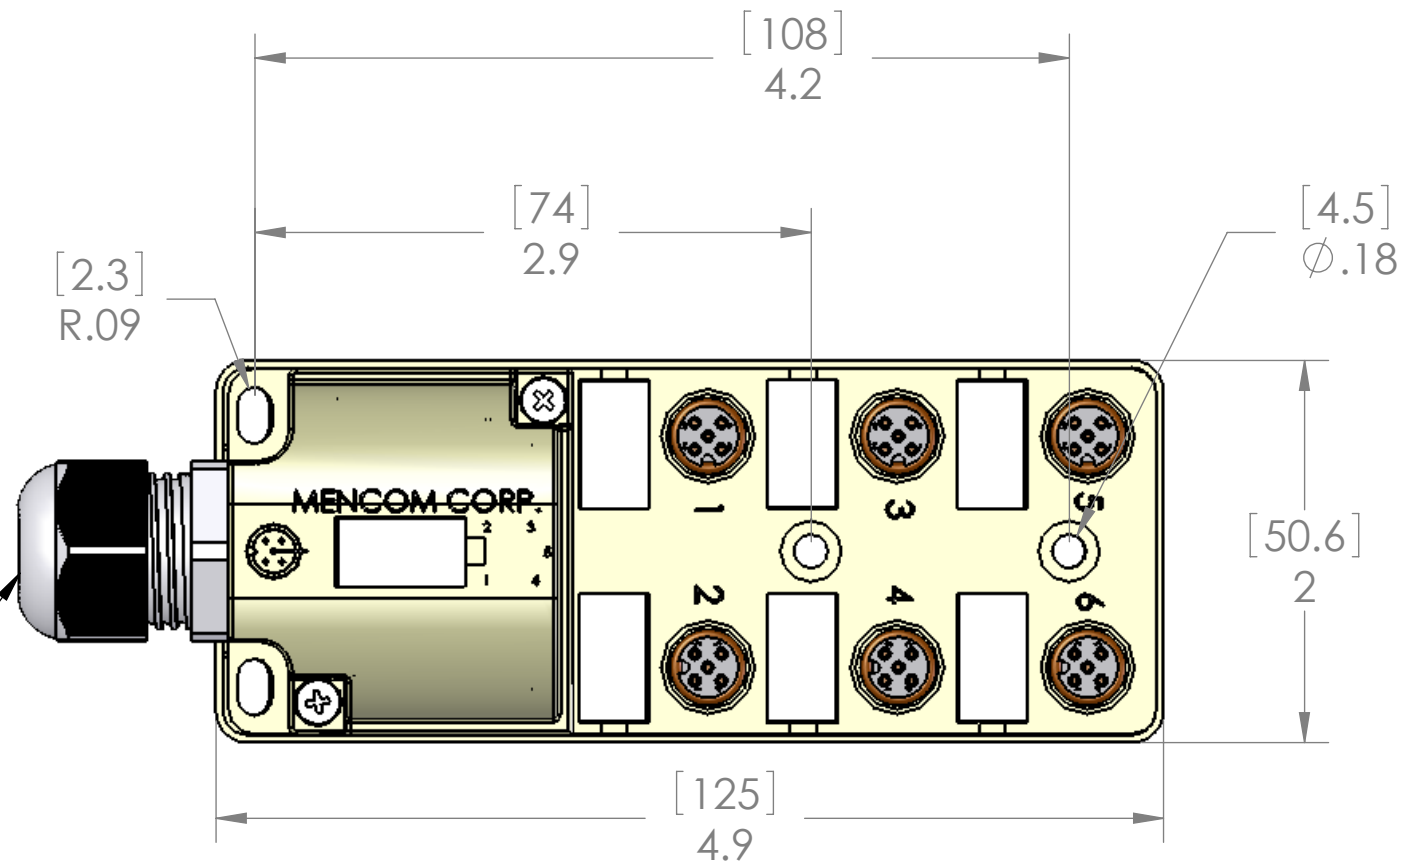

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
GLAND:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

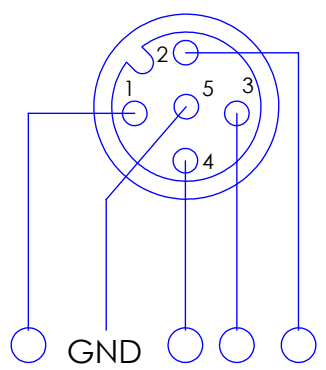

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME		MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]		BEM			
MATERIAL		DRAWN	TITLE:		
FINISH		CHECKED	SIZE DWG. NO. REV		
DO NOT SCALE DRAWING		ENG APPR.	B JDC-6A0-025-F000 B		SHEET 1 OF 1
		MFG APPR.	SCALE: 1:1 WEIGHT:		
		Q.A.			
		COMMENTS:			