






JDC (M12) Junction Blocks

8 Port, 5 Pin JDC Junction blocks




Field Wireable | Cable | D-Sub | IP67 Protection Rating



Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	UL Listed	Field Wireable 24 AWG - 16 AWG	JDC-850-019-F000	JDC-85P-219-F000	JDC-85N-219-F000
	UL Listed	Black PUR AWM With Foil Shield 24 AWG Drain Wire 3 x 18 AWG 16 x 22 AWG 10.9mm OD	JDC-850-019-C**	JDC-85P-219-C**	JDC-85N-219-C**
	N/A	Gray PVC With Foil Shield 20 AWG Drain Wire 21 x 24 AWG 4 x 20 AWG	JDC-850-025-D**	JDC-85P-225-D**	JDC-85N-225-D**

** Lengths in meters. Standard cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

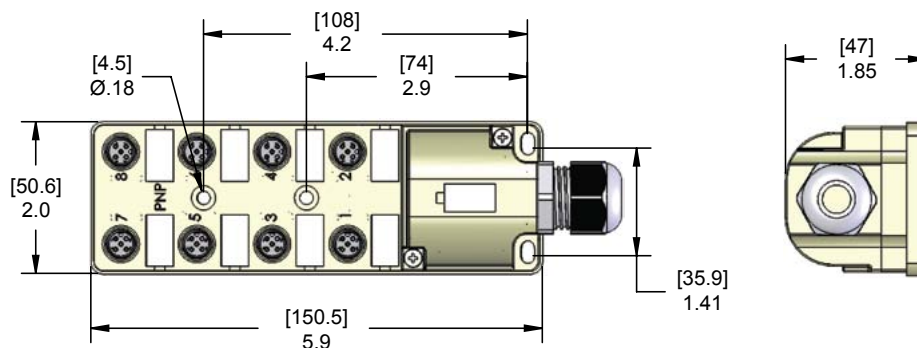

Specifications:

Ratings:	3 A per Connector 8 A per Block
Voltage:	Without LEDs: 0-150 Volt Max With LEDs: 48 VDC Max in accordance with LED Configuration
Body:	Polypropylene
Inserts:	Polyamide
Port Coupling Nuts:	PBT
O-Ring:	BUNA-N
LED Lens:	Polycarbonate
Contacts:	Copper Alloy with Gold Plating
Marker Tags:	Polyamide (supplied on all units)