
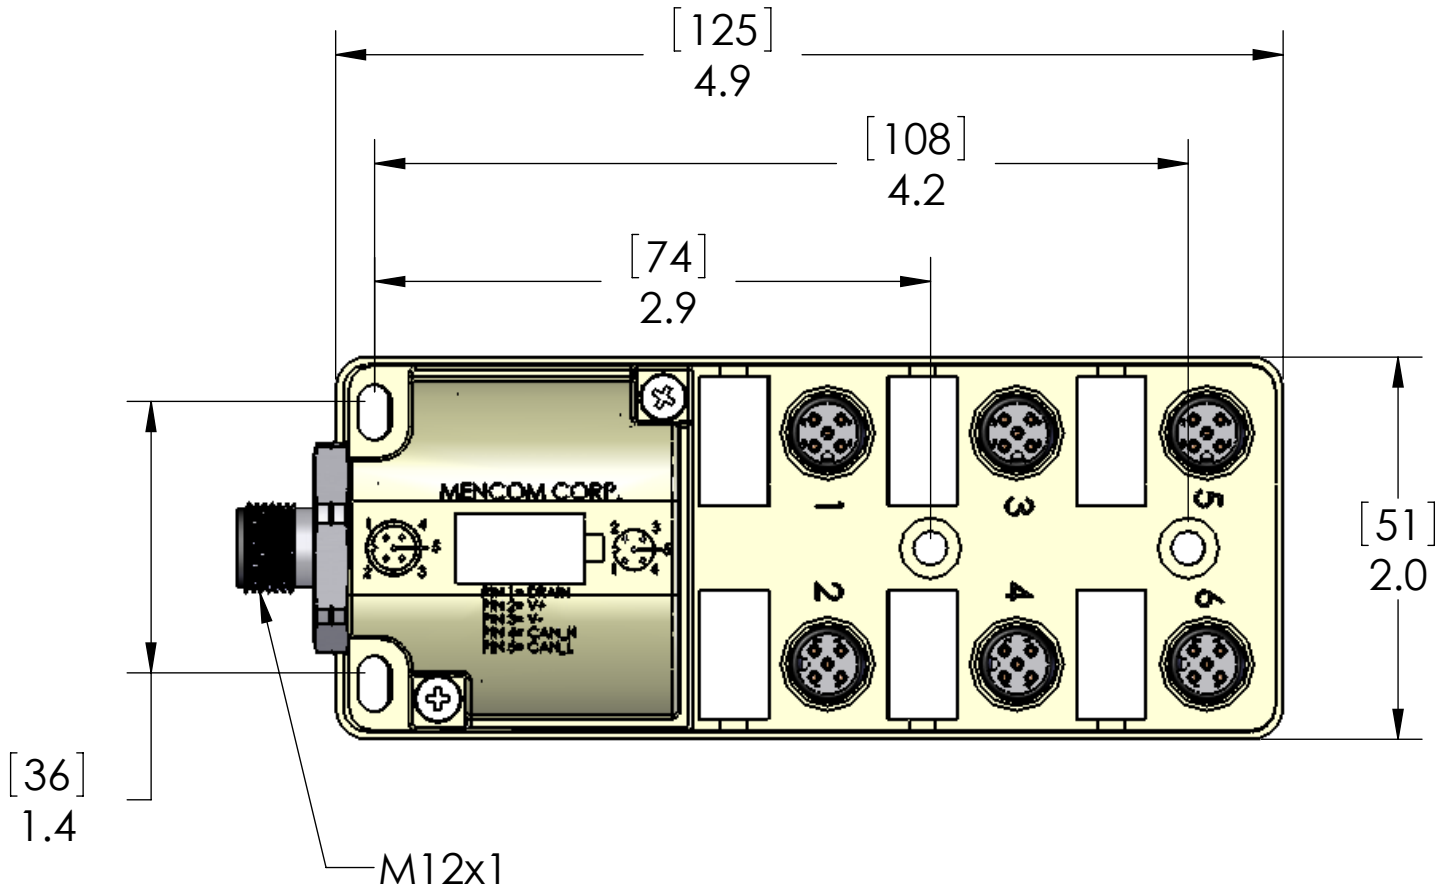


WIRING		
MIN CONN (INCOMING)	MDC CONN (PORT)	FUNCTION
1	1	DRAIN
2	2	V+
3	3	V-
4	4	CAN_H
5	5	CAN_L

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	8/30/2008	

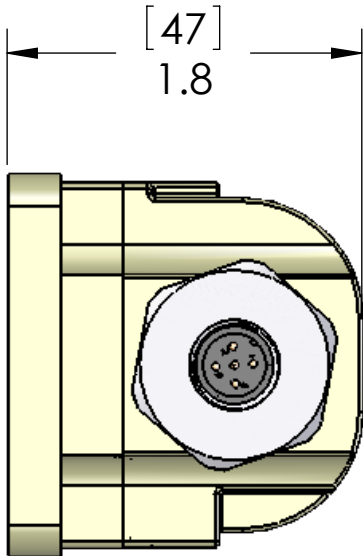

MATERIALS:	
BLOCK HOUSING:	PBT
PORT CONN INSERTS:	POLYAMIDE
CONTACTS:	GOLD PLATED COPPER ALLOY
OUTPUT CONN HSG:	ANODIZED ALUMINUM HSG
OUTPUT CONN INS.:	POLYAMIDE
O-RINGS:	NBR
RATINGS:	
VOLTAGE:	150V MAX
AMPERAGE:	4A MAX

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:  DIMENSIONS ARE IN INCHES AND [MM]	NAME	MENCOM CORPORATION			
			DRAWN	BEM	TITLE:		
			CHECKED				
			ENG APPR.				
			MFG APPR.				
			Q.A.		SIZE DWG. NO. REV <b>B</b> JDN-650-005-E000 <b>A</b>		
		MATERIAL	COMMENTS:				
		FINISH					
		DO NOT SCALE DRAWING					
			SCALE: 1:1	WEIGHT:	SHEET 1 OF 1		