

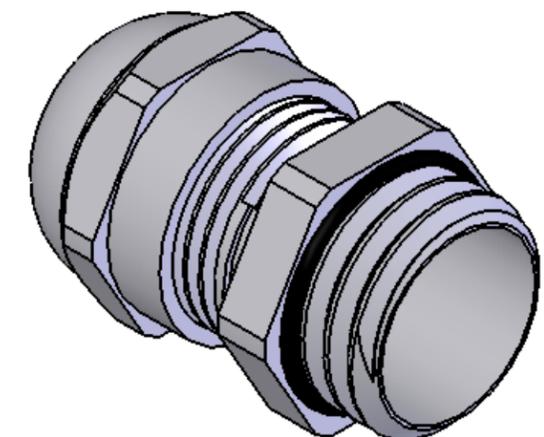


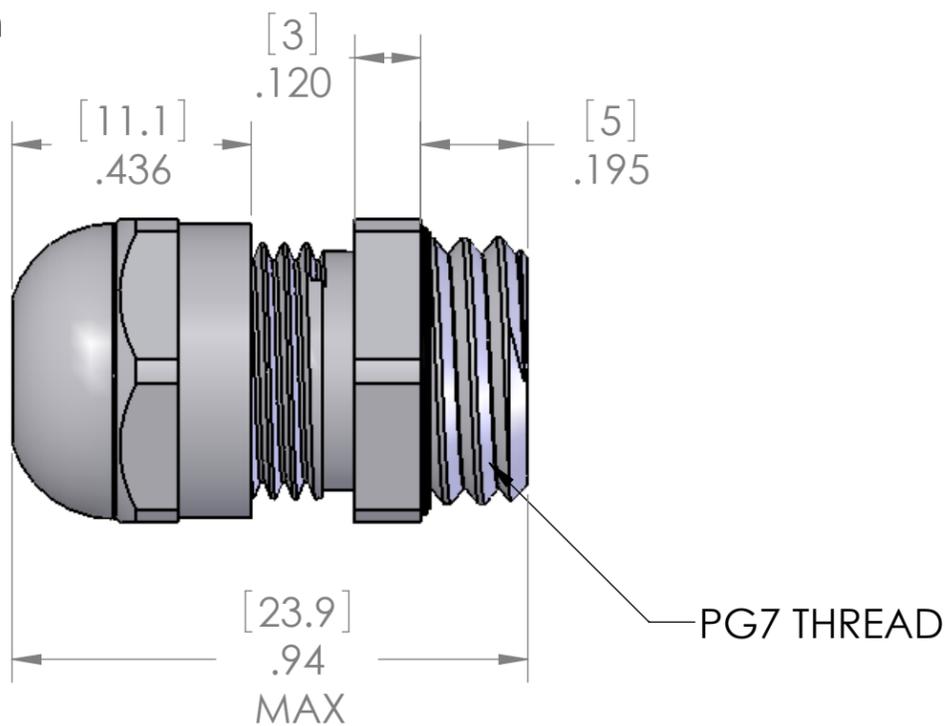

Ⓑ

This is a shielding cable gland. For cables with a shield, the shield needs to be folded slightly around the gray plastic insert to allow the shield to be pinched between the gray plastic insert and the bottom of the gland.

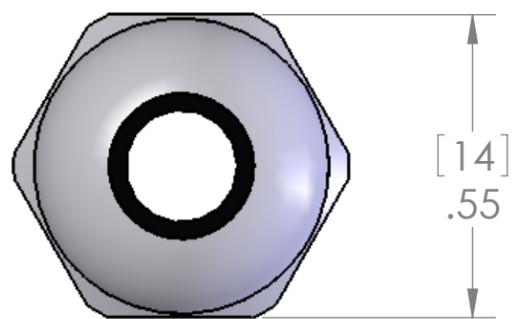

LOCK NUT INCLUDED BUT NOT SHOWN
SEAL RATED TO: IP 68

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	6/1/2006	
B	ADDED SHIELDING DIAGRAM TO PRINT	4/7/2011	

SPECIFICATIONS:	
TIGHTENING TORQUE:	6.25 Nm
TEMPERATURE:	-20°C - +100°C

MATERIALS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
GROMMET:	NEOPRENE
LOCK NUT:	NICKEL PLATED BRASS
O-RING:	BUNA-N

PART NUMBER	SEALING RANGE
MCGB-07	.118 - .255 [3 - 6.5 MM]
MCGB-07R	.079 - .196 [2 - 5 MM]

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

NAME	MENCOM CORPORATION		
DRAWN	DWM	TITLE:	
CHECKED			
ENG APPR.			
MFG APPR.			
Q.A.			
COMMENTS:			
SIZE	DWG. NO.	REV	
B	MCGB-07	B	
SCALE: 3:1	WEIGHT:	SHEET 1 OF 1	