
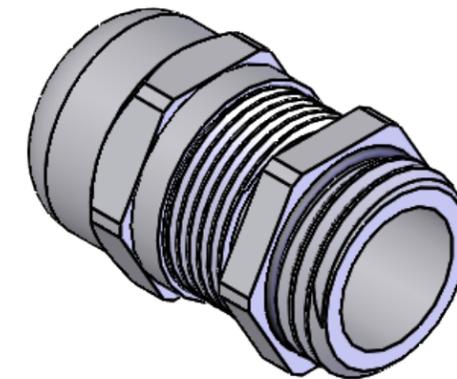
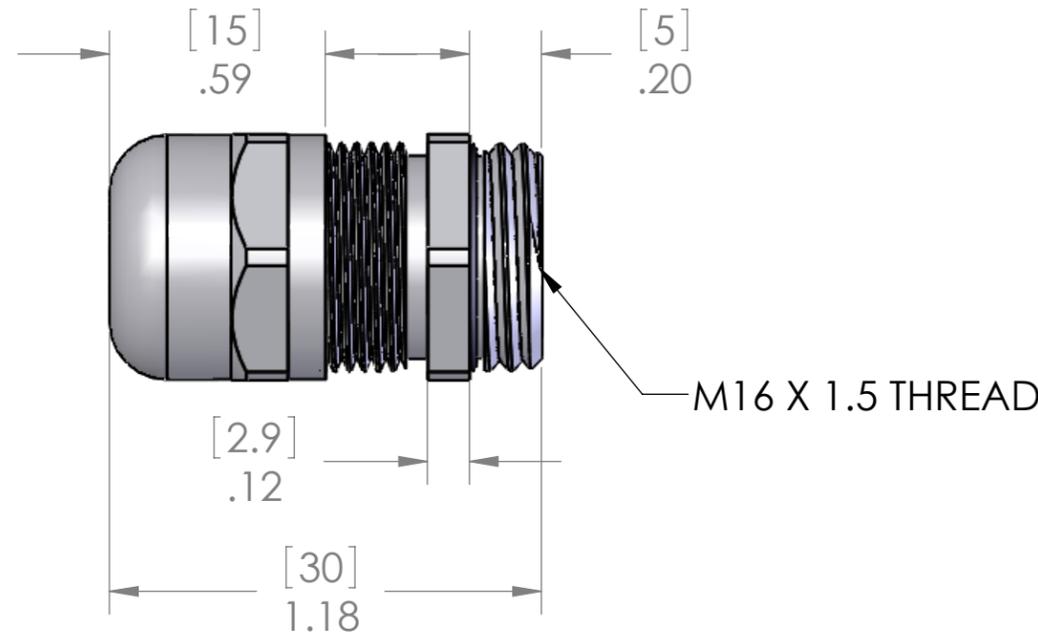


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	4/15/2010	BEM

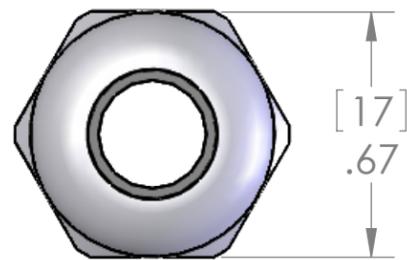

SEALING RANGE: 5-9MM  
SEAL RATED TO: IP 68

**THESE GLANDS ARE EExeII RATED FOR EUROPEAN USE ONLY (DMT 99 ATEX E016)  
THEY HAVE NOT BEEN TESTED TO U.S. EXPLOSION-PROOF RATINGS.**

MATERIALS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
GROMMET:	NBR & TPE
LOCK NUT:	NICKEL PLATED BRASS
O-RING:	BUNA-N
SPECIFICATIONS:	
TEMPERATURE:	-25°C - +80°C

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES		DRAWN	CAM	
TOLERANCES:		CHECKED	TITLE:	
FRACTIONAL ± 1/64		ENG APPR.		
ANGULAR: MACH ± 5° BEND ± 5°		MFG APPR.		
TWO PLACE DECIMAL ± .01		Q.A.		
THREE PLACE DECIMAL ± .004		COMMENTS:		
MATERIAL		SIZE	DWG. NO.	REV
FINISH		<b>B</b>	<b>MCGEX-M16</b>	<b>A</b>
DO NOT SCALE DRAWING		SCALE: 2:1	WEIGHT:	SHEET 1 OF 1