

WIRING		
MALE		FEMALE
PIN #		PIN #
1	-----	1
2	-----	2
3	-----	3
4	-----	4

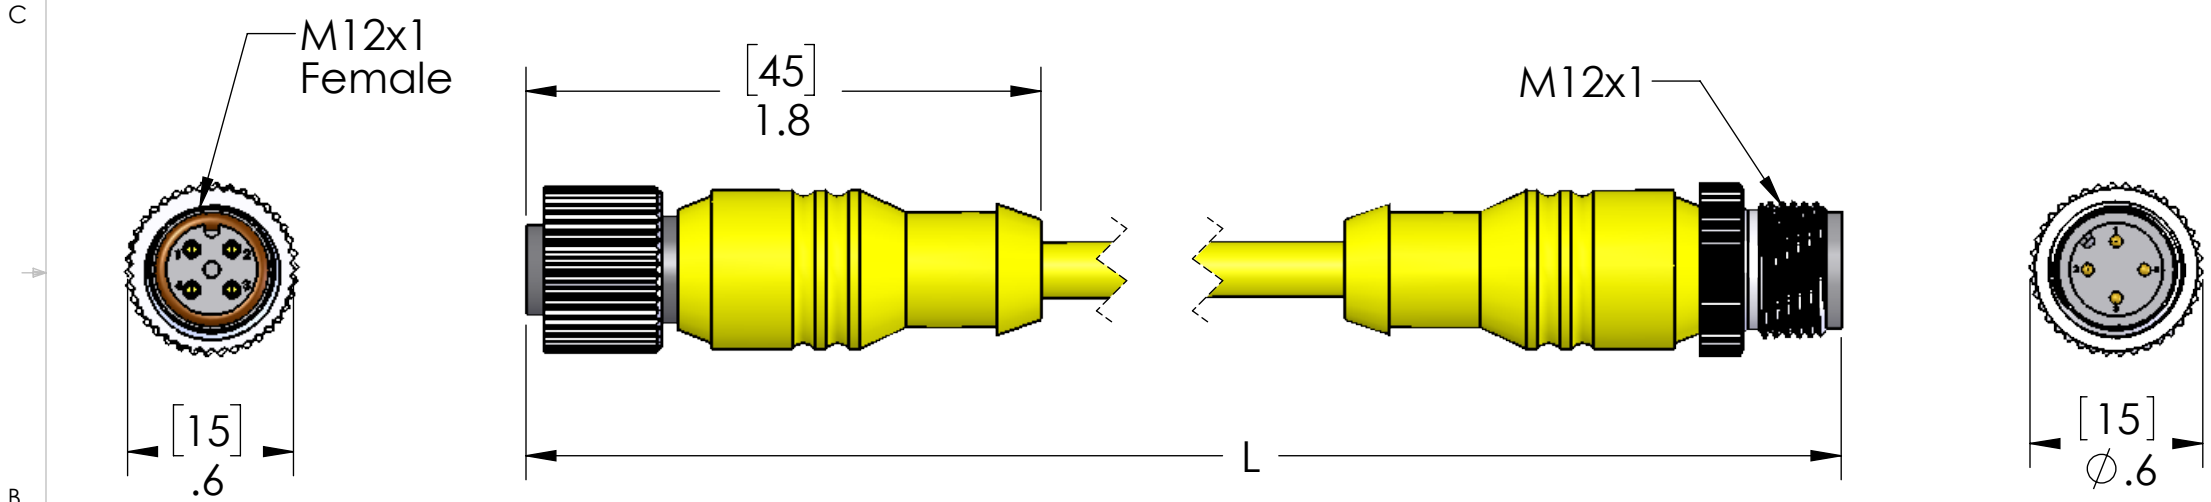


TABLE A		
P/N	L	STD?
MDC-4MFP-0.5M	19" [0.5M]	YES
MDC-4MFP-1M	40" [1M]	YES
MDC-4MFP-2M	79" [2M]	YES
MDC-4MFP-3M	118" [3M]	YES
MDC-4MFP-4M	157" [4M]	YES
MDC-4MFP-5M	197" [5M]	YES
MDC-4MFP-6M	236" [6M]	YES
MDC-4MFP-8M	315" [8M]	NO
MDC-4MFP-10M	393" [10M]	YES
MDC-4MFP-15M	590" [15M]	YES
MDC-4MFP-20M	786" [20M]	YES
MDC-4MFP-25M	983" [25M]	NO
MDC-4MFP-30M	1179" [30M]	YES

MATERIALS	
BODY:	YELLOW PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	22/4 AWM YELLOW JACKET
COUPLING:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
O-RING:	FPM
APPROVALS:	
US	UL LISTED
CANADA	C-UL LISTED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	300V
AMPS	4A
TEMP:	105°C

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

PARTS LISTED AS NOT BEING STANDARD
MAY HAVE MINIMUM ORDER QUANTITIES

MENCOM CORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
B	MDC-4MFP-ZZ	B
SCALE: 3:2	WEIGHT:	SHEET 1 OF 1