



DeviceNet Series Conduit Adapters

5 Conductor DeviceNet Series Conduit Adapters




MIN & MDC Conduit Adapters | 1 & 2 Port | 40V, 4A | 40V, 8A | IP67 Rating

MIN (7/8"-16UN) Conduit Adapters						
# of Poles	Faceview	Rating	# of Ports	Part Number	Body Style	Circuit
5	 7/8"-16UN 1 = DRAIN 2 = +V 3 = -V 4 = CAN_H 5 = CAN_L 1 = -V 2 = CAN_L 3 = DRAIN 4 = CAN_H 5 = +V	40V 8A	1 Port	MINDN-1-5FR-CA		
	2 Port		MINDN-2-5FR-CA			
MDC (M12) Conduit Adapters						
5	 M12 x 1 1 = DRAIN 2 = +V 3 = -V 4 = CAN_H 5 = CAN_L 1 = -V 2 = CAN_L 3 = DRAIN 4 = CAN_H 5 = +V	40V 4A	1 Port	MDCDN-1-5FR-CA		
	2 Port		MDCDN-2-5FR-CA			

Specifications:

Housing: Glass Filled PBT
Recp. Shell: Nickel Plated Brass
Insert: Polyamide
Contacts: Copper Alloy with Gold Plating
Gasket: NBR
Temperature: -40°C to 70°C (-40°F to +158°F)

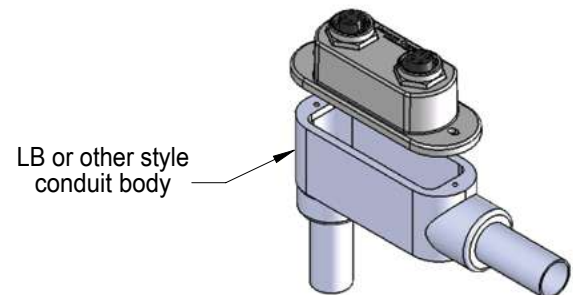

Remove existing Conduit Body cover and replace with Mencom Conduit Adapter.

Works with all standard 3/4" NPT conduit bodies, including Form 8 and Mark 9 adapters. (screws are included with adapter)