

Product data sheet

Characteristics

UTRS101B

Individual meter socket, ringless socket, no bypass, 4 jaws no release, OH, UG, 125 A, up to 600 VAC single phase 3W

Product availability : Stock - Normally stocked in distribution facility



Price* : 123.00 USD



Main

Product or component type	Meter Socket
Meter socket type	Ringless
Hub type	A ACP closing plate

Complementary

Meter socket rated current	125 A
Number of jaws	4 without jaw release
Bypass type	No bypass
Phase	1 phase
[Ue] rated operational voltage	600 V AC
Enclosure material	Steel
Box number	1R
Electrical connection	Lugs slotted
Service feed location	OH
Wiring configuration	3-wire
Device mounting	Surface
AWG gauge	AWG 8...AWG 2/0 1 aluminium/copper)line AWG 14...AWG 2 1 aluminium/copper)service ground
Height	10.88 in (276.35 mm)
Width	8.00 in (203.20 mm)
Depth	3.50 in (88.90 mm)

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Product certifications	UL Listed
Enclosure Rating	NEMA 3R

Ordering and shipping details

Category	00039 - METER SOCKETS & HUBS
Discount Schedule	DE4
GTIN	00785901626633
Nbr. of units in pkg.	1
Package weight(Lbs)	7.01 lb(US) (3.18 kg)
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	4.70 in (11.938 cm)
Package 1 width	8.70 in (22.098 cm)
Package 1 Length	12.50 in (31.75 cm)
Unit Type of Package 2	PAL
Number of Units in Package 2	54
Package 2 Weight	610.00 lb(US) (276.691 kg)
Package 2 Height	40.00 in (101.6 cm)
Package 2 width	40.00 in (101.6 cm)
Package 2 Length	48.00 in (121.92 cm)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Nickel (Metallic), which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
EU RoHS Directive	Under investigation

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

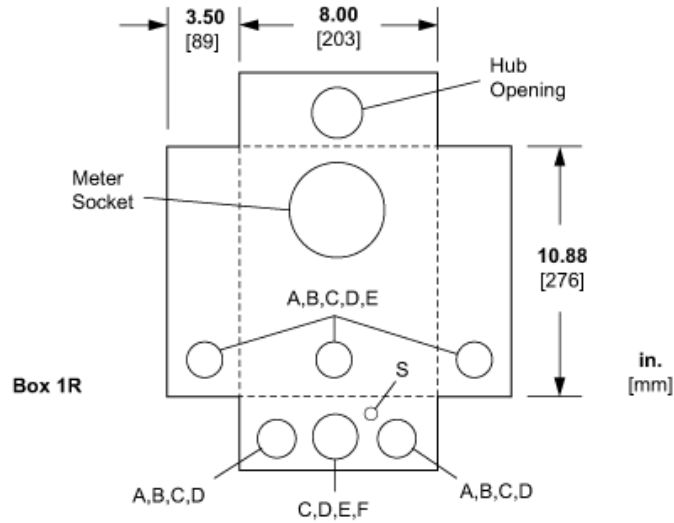

Knockouts

Symbol	A	B	C	D	E	F	S*
Conduit size (in.)	1/2	3/4	1	1-1/4	1-1/2	2	5/16

* Knockout for grounding conductor

Hubs

(Series A - listed by conduit size)

Description	Catalog No.
1.00 in.	A100
1.25 in.	A125
1.50 in.	A150
2.00 in.	A200
2.50 in.	A250

Closing Plates

(to seal hub openings)

Description	Catalog No.
Steel	ACP
Aluminum	ACPA