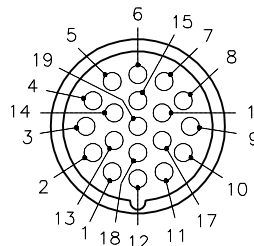



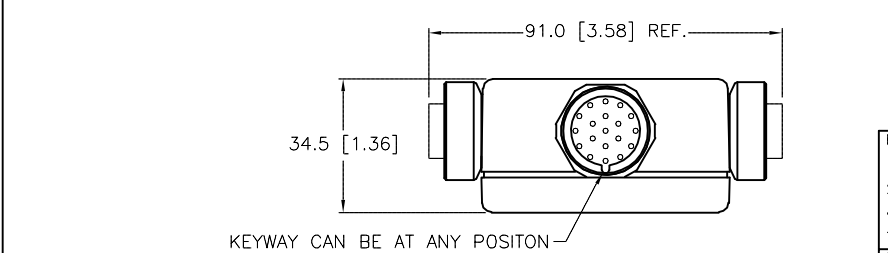
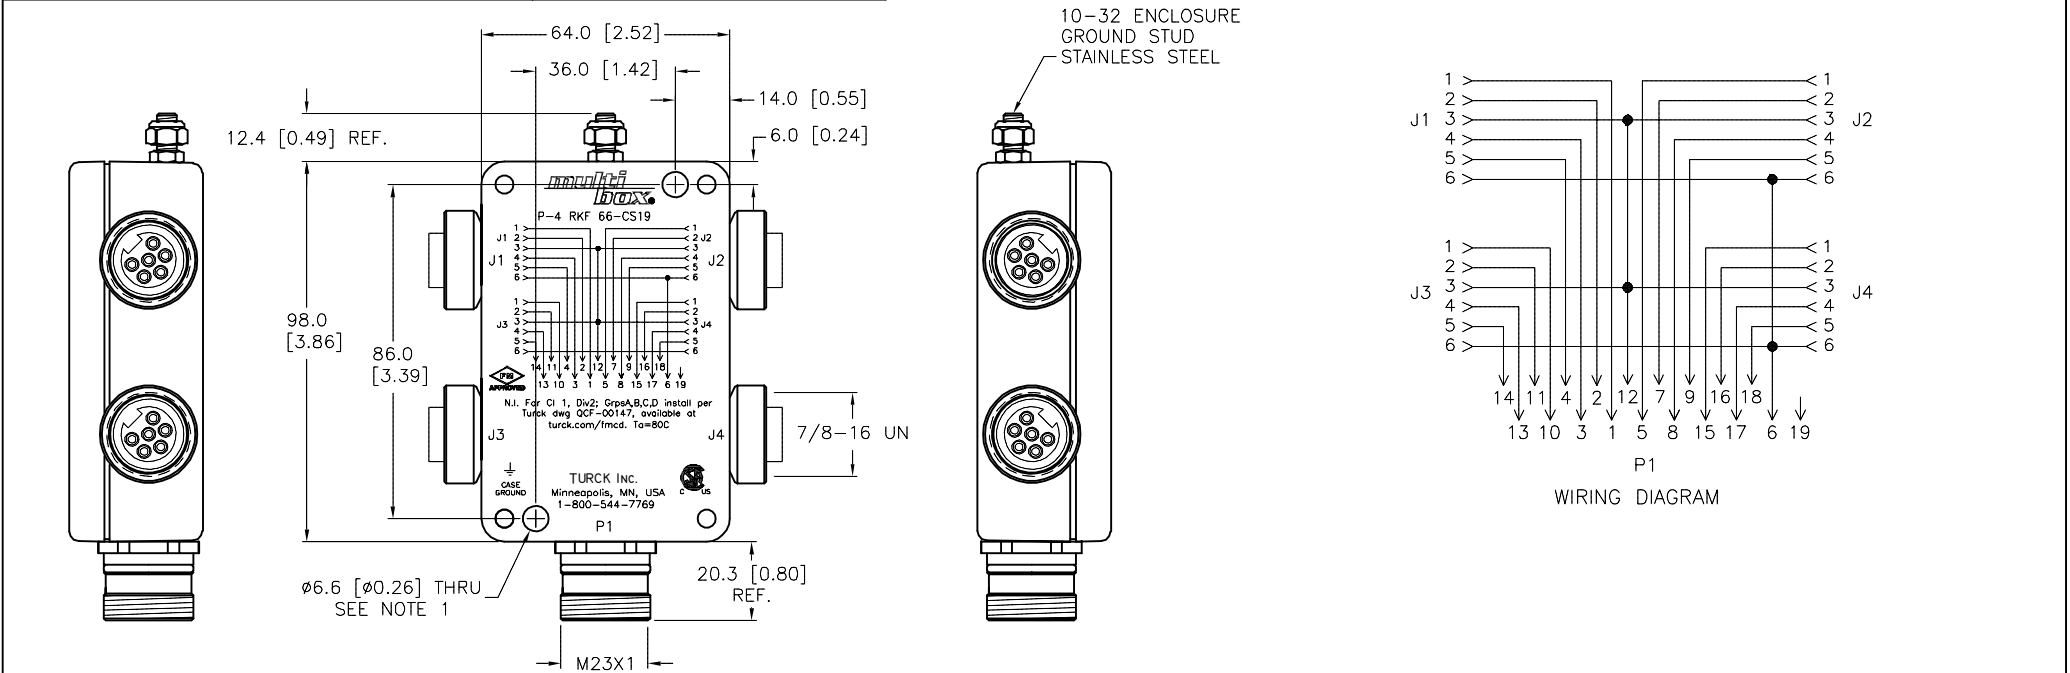



SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIERS/COLOR (J1-J4)	TPU/BLACK
CONTACT CARRIER/COLOR (P1)	NYLON or PBT/GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	150 V
OPERATING CURRENT	3.0 A
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +80°C (-40°F to +176°F)

MALE END VIEW (P1)	FEMALE END VIEW
 <div><div>1 = PORT 1-1</div><div>2 = PORT 1-2</div><div>3 = PORT 1-4</div><div>4 = PORT 1-5</div><div>5 = PORT 2-1</div><div>6 = SHIELD</div><div>7 = PORT 2-2</div><div>8 = PORT 2-4</div><div>9 = PORT 2-5</div><div>10 = PORT 3-1</div><div>11 = PORT 3-2</div><div>12 = GROUND</div><div>13 = PORT 3-4</div><div>14 = PORT 3-5</div><div>15 = PORT 4-1</div><div>16 = PORT 4-2</div><div>17 = PORT 4-4</div><div>18 = PORT 4-5</div><div>19 = N/C</div></div> <div> M23 connector</div>	 <div><div>(J1-J4)</div><div>1 = PORT 1-1</div><div>2 = PORT 1-2</div><div>3 = PORT 1-4</div><div>4 = PORT 1-5</div><div>5 = PORT 2-1</div><div>6 = SHIELD</div></div> <div> mini fast</div>



NOTES:				
1. CLEARANCE HOLE FOR 1/4-20 MOUNTING SCREWS (2 NOT INCLUDED).				

D	UPDATE TEMPERATURE RATING	NF	03/26/19	68987
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
	MATERIAL  SEE SPECIFICATIONS	DRFT RDS	DATE 07/30/08	DESCRIPTION  P-4 RKF 66-CS19
FINISH  SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	APVD	SCALE 1=2.0	IDENTIFICATION NO.  U2-14384
UNIT OF MEASUREMENT  MILLIMETER [ INCH ]		DO NOT SCALE THIS DRAWING		REV  D
FILE: U2-14384		SHEET 1 OF 1		