Product data sheet Characteristics

HGL36025T

Circuit breaker, PowerPacT H, thermal magnetic, unit mount, 25A, 3 pole, 18 kA, 600 VAC, interchangable trip unit, 80%

Product availability: Non-Stock - Not normally stocked in distribution facility

SQUARE D



Price*: 2,239.50 USD



Main

Range of product	PowerPact H	-65
Product or component type	Circuit breaker	

Complementary

Complementary		
Line Rated Current	25 A	
Number of Poles	3P	
Breaking capacity code	G	-
Mounting mode	Unit mount	
Magnetic hold current	350 A	<u>,</u>
Magnetic tripping current	750 A	<u>2</u>
Electrical connection	Lugs load Lugs line	
Tightening torque	44.25 lbf.in (5 N.m) 0.000.15 in² (2.595 mm²) (AWG 14AWG 3/0)	700
Height	6.4 in (162.56 mm)	
Width	4.12 in (104.65 mm)	; ;
Depth	4.36 in (110.74 mm)	9
Continuous current rating	80 %	
		5

Environment

LITVITOTITICITE		. <u>w</u>
Product certifications	IEC	<u></u> c
	CE	in the second se
	UL Listed	Ë
	CCC	0
	CSA	in i
Ambient air temperature for operation	104 °F (40 °C)	

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.



Ordering and shipping details

Category	01115 - HG,HJ,JG,JJ UNIT MT BREAKER/SWITCH
Discount Schedule	DE2
GTIN	00785901147053
Nbr. of units in pkg.	1
Package weight(Lbs)	1 lb(US) (0.45 kg)
Returnability	Yes
Country of origin	US


Offer Sustainability

WARNING: This product can expose you to chemicals including: DINP, which is known to the State	
of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov	
REACh Declaration	
Compliant EU RoHS Declaration	
Yes	
Yes	
China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.	
Product Environmental Profile	
End of Life Information	
Yes	

Contractual warranty

Warranty	18 months

Dimensions

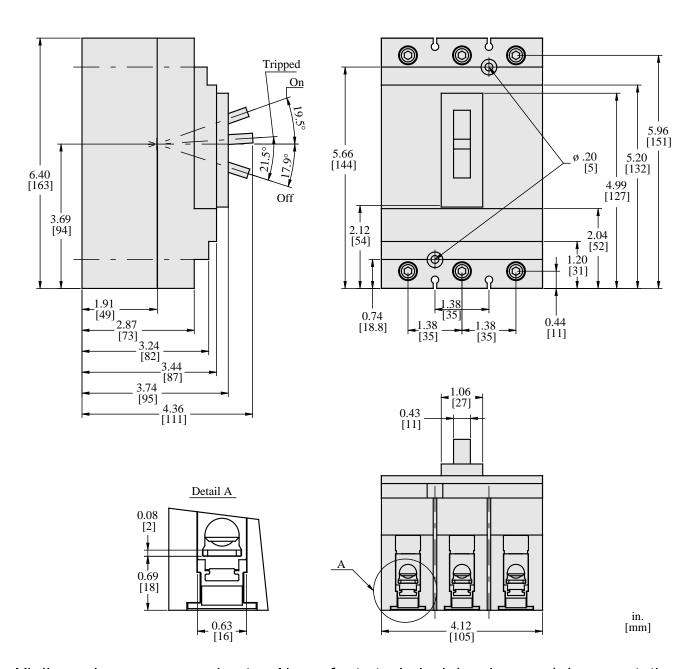

All dimensions are approximate. Also refer to technical drawings and documentation.