

MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 1000VA IN: 240-415VAC OUT: 110-110-20VAC


Single-phase - Control and Isolation Transformers 1000 VA Spring clamp terminals Isolation class T 60/B

Link to Product

Illustration



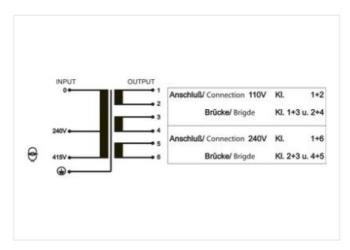



Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20+60 °C (storage temperature -40+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	111.5×135×7 mm

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13



Dimensions H×W×D	138×174×160 mm
Output	
Output voltage	110/240 V AC
Output rating	1000 VA
Input	
Input voltage	240/415 V AC
Inrush current	110 A (240 V AC); 62.5 A (415 V AC)
Short-circuit current	138 A (240 V AC); 79.4 A (415 V AC)
Input current	4.64 A (240 V AC); 2.68 A (415 V AC)
Frequency	5060 Hz
Product article number of manufacturer	6686055